





## A Special Note To Our Customers

*Here's a valuable PLC reference that you can use right now. This particular reference is taken from our award-winning textbook—**Programmable Controllers: Theory and Implementation, 2nd Edition**.*

*In it, you'll learn about I/O bus networks—the powerful network that lets controllers better communicate with their I/O field devices. There's also lots of examples and tables to help explain the topics.*

*Best yet, we've included the corresponding chapter from the companion workbook. Here you can look over the key points as well as see how much you learned by answering the review questions. And, yes, the answers are also included.*

*This PLC reference is just a sample of what the textbook and workbook have to offer. If you like it, we've included the product literature page with the order number.*

*Industrial Text & Video Company*

*1-800-752-8398*

*[www.industrialtext.com](http://www.industrialtext.com)*

# PLC Reference Book

“You covered a huge amount of detail very well. It was very easy to understand.”

—Jeff Camp, United Control Corp.

**The biggest book on PLCs.** Written by industry experts, this book covers important, up-to-date, real-world programmable controller topics and applications. This new edition is completely revised and updated to give you the latest developments and insights from the field. At 5 pounds and 1,035 pages, it puts all the PLC information you need at your fingertips. And, since this is a generic PLC reference, it will help you with all of the different makes and models of PLCs in your facility.

But, this book is about more than just PLCs—it also thoroughly explains process control, instrumentation, and plant networks. Whether you're already an expert on PLCs or just starting out, our problem-solving approach is guaranteed to help you succeed.

Catalog# ABT-ITV206BOOK \$88

## 21 Chapters of PLC Know-How

### TABLE OF CONTENTS

- 1: Introduction to Programmable Controllers
- 2: Number Systems and Codes
- 3: Logic Concepts
- 4: Processors, the Power Supply, and Programming Devices
- 5: The Memory System and I/O Interaction
- 6: The Discrete Input/Output System
- 7: The Analog Input/Output System
- 8: Special Function I/O and Serial Communication Interfacing
- 9: Programming Languages
- 10: The IEC-1131 Standard and Programming Language
- 11: System Programming and Implementation
- 12: PLC System Documentation
- 13: Data Measurements and Transducers
- 14: Process Responses and Transfer Functions
- 15: Process Controllers and Loop Tuning
- 16: Artificial Intelligence and PLC Systems
- 17: Fuzzy Logic
- 18: Local Area Networks
- 19: I/O Bus Networks
- 20: PLC Start-Up and Maintenance
- 21: System Selection Guidelines



## • Valuable Maintenance Tips •

### SELECTION, INSTALLATION & SAFETY

- ✓ Follow our 11 major steps in selecting a PLC for an application and avoid using the wrong controller
- ✓ Install sinking and sourcing inputs and outputs properly—one wrong wire and it won't work
- ✓ Implement safety circuits correctly in PLC applications to protect people and equipment
- ✓ Prevent noise, heat, and voltage variations from ruining your PLC system
- ✓ Implement a step-by-step static and dynamic start-up checkout to guarantee smooth PLC system operation
- ✓ Design preventive safety and maintenance into your total control system

### TROUBLESHOOTING & MAINTENANCE

- ✓ Learn no-nonsense troubleshooting procedures to reduce downtime
- ✓ Troubleshoot analog I/O and avoid undesirable count jumps
- ✓ Learn 6 preventive maintenance procedures to keep your PLC system running fault free
- ✓ Learn a step-by-step procedure for finding hidden ground loops
- ✓ Learn how to deal with leaky inputs
- ✓ Identify vibration problems and use them for preventive engineering control
- ✓ Control excessive line voltage and avoid intermittent shutdowns

### PROGRAMMING

- ✓ Learn the number systems and codes used in PLC addressing
- ✓ Eliminate the confusion of ladder logic programming
- ✓ Master all types of timers and counters used in real-life applications
- ✓ Avoid ladder scan evaluation problems
- ✓ Implement a safe circuit with hardware and software interlocking

# Programmable Controllers: Workbook/Study Guide



“Sometimes you think you know it all, but after reading the questions, I often times had to refer back to the theory book.”

—Ernest Presto, Electrical Engineer, Polyclad Laminates, Inc.

Imagine having the answers to over 800 PLC problems at your fingertips. That's what you get with *Programmable Controllers: Workbook and Study Guide*. At 334 pages, it's the perfect companion to *Programmable Controllers: Theory and Implementation*, 2nd Edition.

This workbook provides not only valuable summaries of each of the text-book's twenty-one chapters, but also over 800 review questions. And each of the review questions includes a detailed answer and explanation. Use it on the job to brush up on the essentials and to solve any PLC problem.

Whether you're an expert or just learning about PLCs, you'll find plenty to put your skills to the test.

## You Will Learn:


Catalog #ABT-ITV206WKBK \$28

- Proper address assignment and interfacing
- Basic PLC ladder program implementation
- Data measurement
- Internal coil assignments
- Proper digital and analog interfacing procedures
- Advanced function block programming
- Network protocols
- Analog input and output data handling
- Correct PLC installation

## Perfect textbook companion:

- 800 answers to common PLC problems at your fingertips
- Makes a great review tool
- Practice PLC addressing and programming
- Great on-the-job quick-reference guide
- Separate answer section makes quizzing easy
- Valuable chapter summaries


Sample pages from the workbook




## Sample Problem

A sample problem from Chapter 11 of the workbook:  
*System Programming and Implementation*

Q. Circle the locations where timer traps will be used in the PLC implementation of this reduced-voltage start motor circuit.



A.



# I/O Bus Networks— Including DeviceNet

*Necessity is the mother of invention.*

—Latin Proverb

## Key Terms

**Acyclic message**—an unscheduled message transmission.

**Bit-wide bus network**—an I/O bus network that interfaces with discrete devices that transmit less than 8 bits of data at a time.

**Byte-wide bus network**—an I/O bus network, which interfaces with discrete and small analog devices, that can transmit between 1 and 50 or more bytes of data.

**Cyclic message**—a scheduled message transmission.

**Device bus network**—A network that allows low-level I/O devices that transmit relatively small amounts of information to communicate directly with a PLC.

**I/O bus network**—a network that lets I/O devices communicate directly to a PLC through digital communication.

**Process bus network**—a network that allows high-level analog I/O devices that transmit large amounts of information to communicate directly with a PLC.

**Tree topology**—a network architecture in which the network has many nodes located in many branches of the network.

© 1999 by Industrial Text and Video Company  
Published by Industrial Text and Video Company  
All rights reserved.

Reproduction or translation of any part of this work beyond that permitted by Sections 107 and 108 of the 1976 United States Copyright act are unlawful.  
Requests for permission, accompanying workbooks, or further information should be addressed to:  
Industrial Text and Video Company  
1950 Spectrum Circle  
Tower A-First Floor  
Marietta, Georgia 30067  
(770) 240-2200  
(800) PLC-TEXT

Due to the nature of this publication and because of the different applications of programmable controllers, the readers or users and those responsible for applying the information herein contained must satisfy themselves to the acceptability of each application and the use of equipment therein mentioned. In no event shall the publisher and others involved in this publication be liable for direct, indirect, or consequential damages resulting from the use of any technique or equipment herein mentioned.

The illustrations, charts, and examples in this book are intended solely to illustrate the methods used in each application example. The publisher and others involved in this publication cannot assume responsibility or liability for actual use based on the illustrative uses and applications.

No patent liability is assumed with respect to use of information, circuits, illustrations, equipment, or software described in this text.

# Contents

1	INTRODUCTION TO I/O BUS NETWORKS .....	4
2	TYPES OF I/O BUS NETWORKS.....	7
	PROTOCOL STANDARDS .....	8
3	ADVANTAGES OF I/O BUS NETWORKS.....	9
4	DEVICE BUS NETWORKS .....	10
	BYTE-WIDE DEVICE BUS NETWORKS.....	10
	BIT-WIDE DEVICE BUS NETWORKS .....	18
5	PROCESS BUS NETWORKS.....	23
	FIELDBUS PROCESS BUS NETWORK.....	25
	PROFIBUS PROCESS BUS NETWORK .....	30
6	I/O BUS INSTALLATION AND WIRING CONNECTIONS .....	34
	INSTALLATION GUIDELINES .....	34
	DEVICE BUS NETWORK WIRING GUIDELINES .....	36
	PROCESS BUS NETWORK WIRING GUIDELINES .....	37
	I/O BUS NETWORK ADDRESSING.....	39
7	SUMMARY OF I/O BUS NETWORKS.....	40
	STUDY GUIDE .....	44
	REVIEW QUESTIONS .....	47
	ANSWERS.....	52



## HIGHLIGHTS

Advances in large-scale electronic integration and surface-mount technology, coupled with trends towards decentralized control and distributed intelligence to field devices, have created the need for a more powerful type of network—the I/O bus network. This new network lets controllers better communicate with I/O field devices, to take advantage of their growing intelligence. Here, we will introduce the I/O bus concept and describe the two types of I/O bus networks—device-level bus and process bus. In our discussion, we will explain these network’s standards and features. We will also list the specifications for I/O bus networks and summarize their uses in control applications. When you finish, you will have learned about all the aspects of a PLC control system—hardware, software, and communication schemes—and you will be ready to apply this knowledge to the installation and maintenance of a PLC system.

## 1 INTRODUCTION TO I/O BUS NETWORKS

**I/O bus networks** allow PLCs to communicate with I/O devices in a manner similar to how local area networks let supervisory PLCs communicate with individual PLCs (see Figure 1). This configuration decentralizes control in the PLC system, yielding larger and faster control systems. The topology, or physical architecture, of an I/O bus network follows the bus or extended bus (tree) configuration, which lets field devices (e.g., limit, photoelectric, and proximity switches) connect directly to either a PLC or to a local area network bus. Remember that a bus is simply a collection of lines that transmit data and/or power. Figure 2 illustrates a typical connection between a PLC, a local area network, and an I/O bus network.

The basic function of an I/O bus network is to communicate information with, as well as supply power to, the field devices that are connected to the bus (see Figure 3). In an I/O bus network, the PLC drives the field devices directly, without the use of I/O modules; therefore, the PLC connects to and communicates with each field I/O device according to the bus’s protocol. In essence, PLCs connect with I/O bus networks in a manner similar to the way they connect with remote I/O, except that PLCs in an I/O bus use an **I/O bus network scanner**. An I/O bus network scanner reads and writes to each field device address, as well as decodes the information contained in the network information packet. A large, **tree topology** bus network (i.e., a network with many branches) may have up to 2048 or more connected discrete field devices.

The field devices that connect to I/O bus networks contain intelligence in the form of microprocessors or other circuits (see Figure 4). These devices communicate not only the ON/OFF state of input and output controls, but also diagnostic information about their operating states. For example, a photoelectric sensor (switch) can report when its internal gain starts to





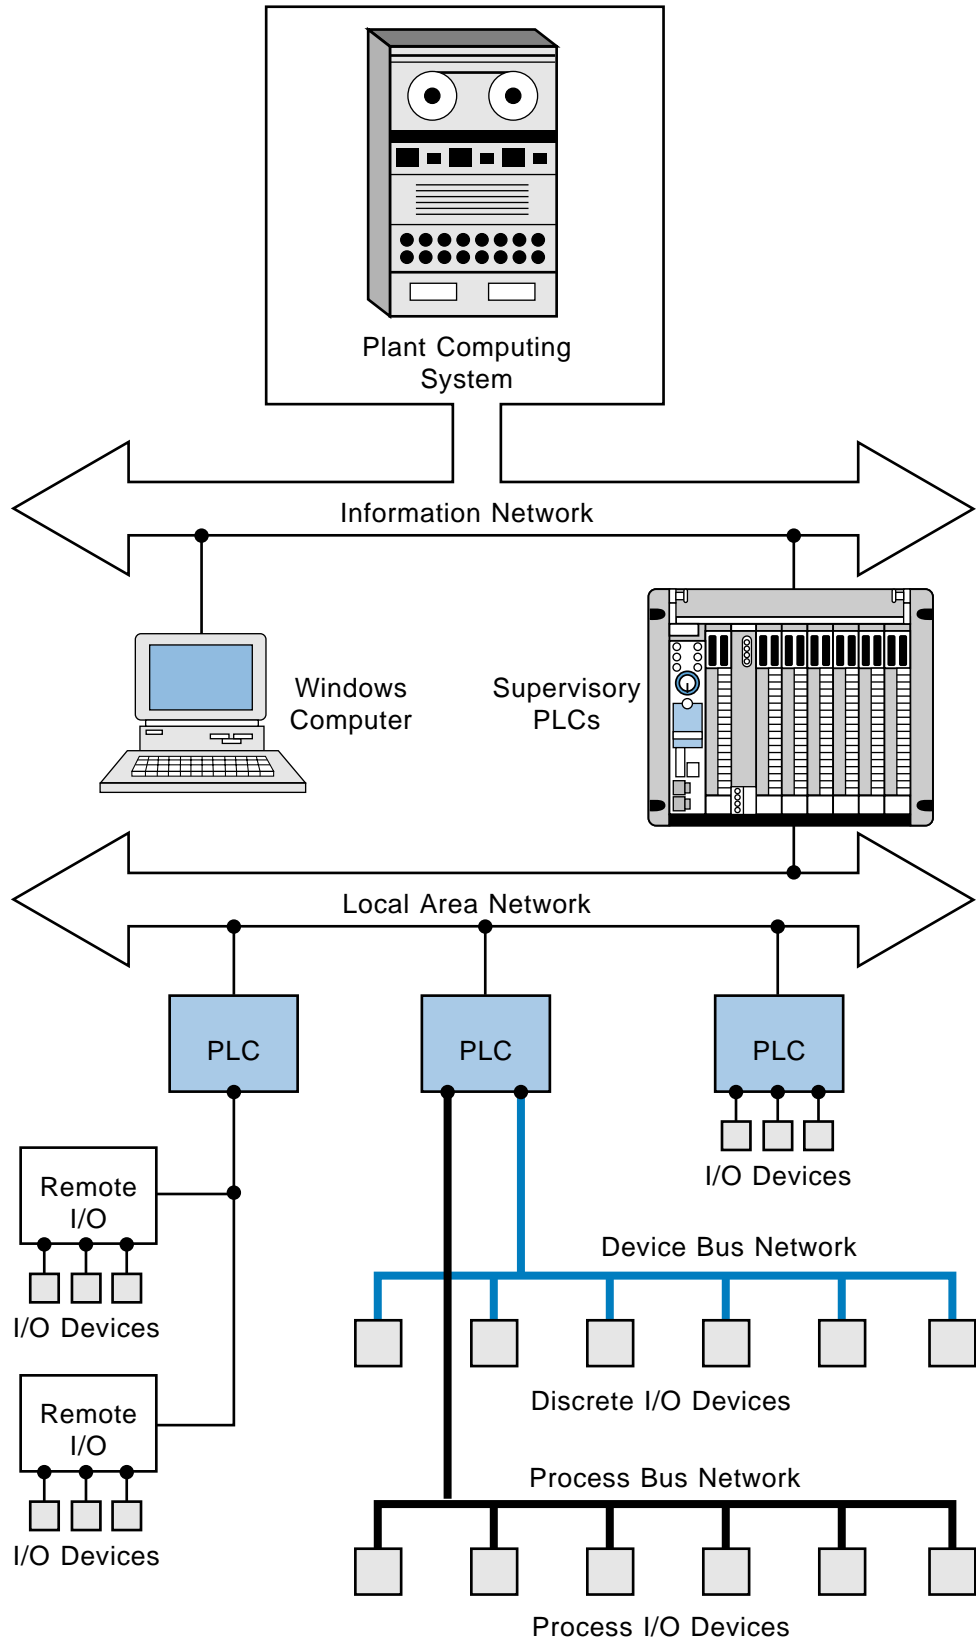



Figure 1. I/O bus network block diagram.

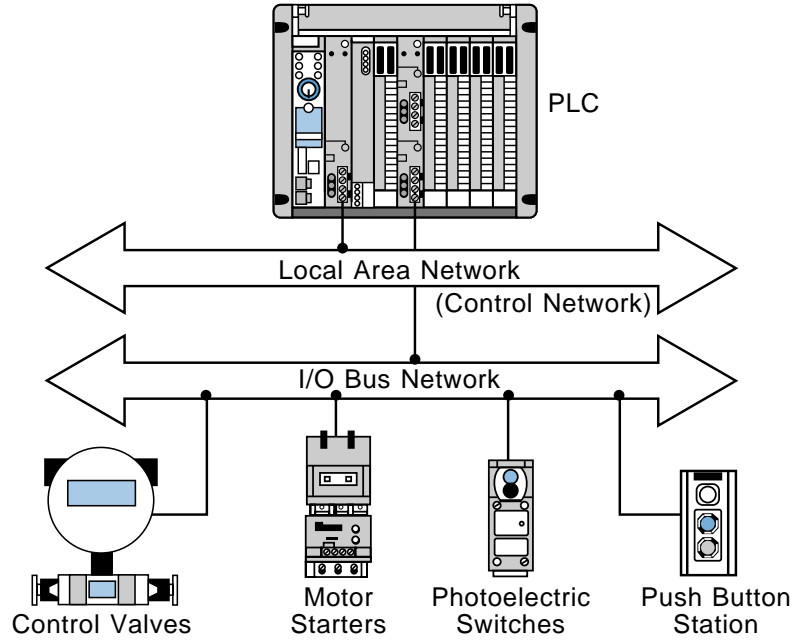

**Figure 2.** Connection between a PLC, a local area network, and an I/O bus network.

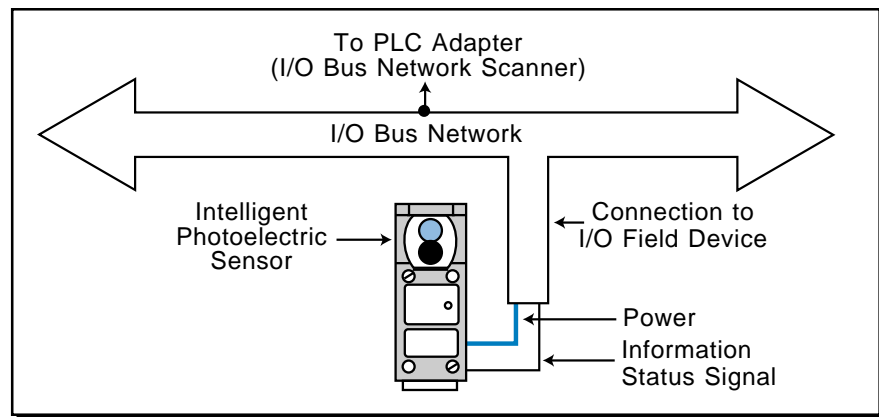

**Figure 19-3.** Connections for an I/O bus network.

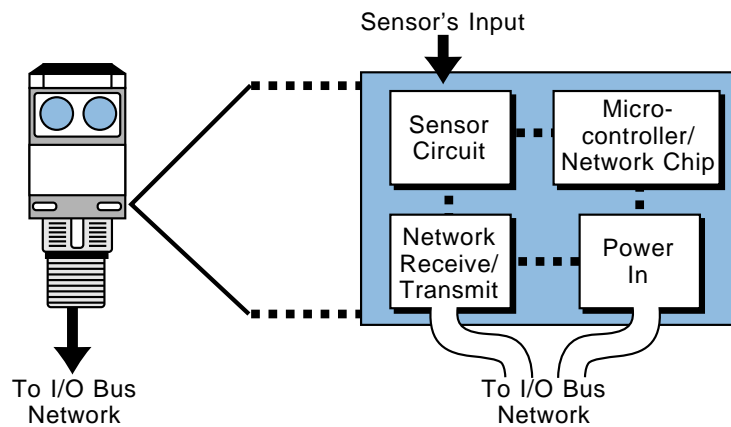

**Figure 4.** Intelligent field device.

decrease because of a dirty lens, or a limit switch can report the number of motions it has performed. This type of information can prevent I/O device malfunction and can indicate when a sensor has reached the end of its operating life, thus requiring replacement.


## 2 TYPES OF I/O BUS NETWORKS

I/O bus networks can be separated into two different categories—one that deals with low-level devices that are typical of discrete manufacturing operations and another that handles high-level devices found in process industries. These bus network categories are:

- device bus networks
- process bus networks

**Device bus networks** interface with low-level information devices (e.g., push buttons, limit switches, etc.), which primarily transmit data relating to the state of the device (ON/OFF) and its operational status (e.g., operating OK). These networks generally process only a few bits to several bytes of data at a time. **Process bus networks**, on the other hand, connect with high-level information devices (e.g., smart process valves, flow meters, etc.), which are typically used in process control applications. Process bus networks handle large amounts of data (several hundred bytes), consisting of information about the process, as well as the field devices themselves. Figure 5 illustrates a classification diagram of the two types of I/O bus networks.

The majority of devices used in process bus networks are analog, while most devices used in device bus networks are discrete. However, device bus networks sometimes include analog devices, such as thermocouples and variable speed drives, that transmit only a few bytes of information. Device

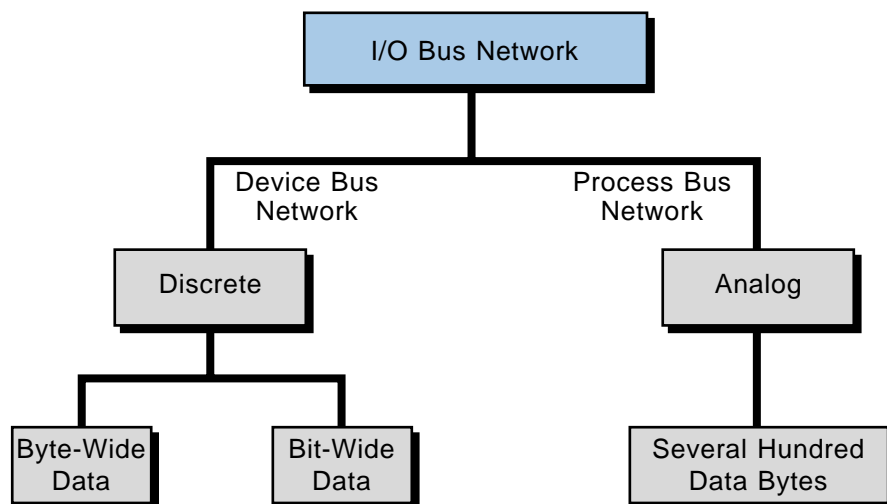

**Figure 5.** I/O bus network classification diagram.


bus networks that include discrete devices, as well as small analog devices, are called **byte-wide bus networks**. These networks can transfer between 1 and 50 or more bytes of data at a time. Device bus networks that only interface with discrete devices are called **bit-wide bus networks**. Bit-wide networks transfer less than 8 bits of data from simple discrete devices over relatively short distances.

The primary reason why device bus networks interface mainly with discrete devices and process bus networks interface mainly with analog devices is the different data transmission requirements for these devices. The size of the information packet has an inverse effect on the speed at which data travels through the network. Therefore, since device bus networks transmit only small amounts of data at a time, they can meet the high speed requirements for discrete implementations. Conversely, process bus networks work slower because of their large data packet size, so they are more applicable for the control of analog I/O devices, which do not require fast response times. The transmission speeds for both types of I/O bus networks can be as high as 1 to 2.5 megabits per second. However, a device bus network can deliver many information packets from many field devices in the time that it takes a process bus network to deliver one large packet of information from one device.

Since process bus networks can transmit several hundred bytes of data at a time, they are suitable for applications requiring complex data transmission. For example, an intelligent, process bus network-compatible pressure transmitter can provide the controller with much more information than just pressure; it can also transmit information about temperature flow rate and internal operation. Thus, this type of pressure transmitter requires a large data packet to transmit all of its process information, which is why a process bus network would be appropriate for this application. This amount of information just would not fit on a device bus network.

## PROTOCOL STANDARDS

Neither of the two I/O bus networks have established protocol standards; however, many organizations are working towards developing both discrete and process bus network specifications. In the process bus area, two main organizations, the Fieldbus Foundation (which is the result of a merger between the Interoperable Systems Project, ISP, Foundation and the World FIP North American group) and the Profibus (Process Field Bus) Trade Organization, are working to establish network and protocol standards. Other organizations, such as the Instrument Society of America (ISA) and the European International Electronics Committee (IEC), are also involved in developing these standards. This is the reason why some manufacturers specify that their analog products are compatible with Profibus, Fieldbus, or another type of protocol communication scheme. Figure 6 illustrates a block diagram of available network and protocol standards.

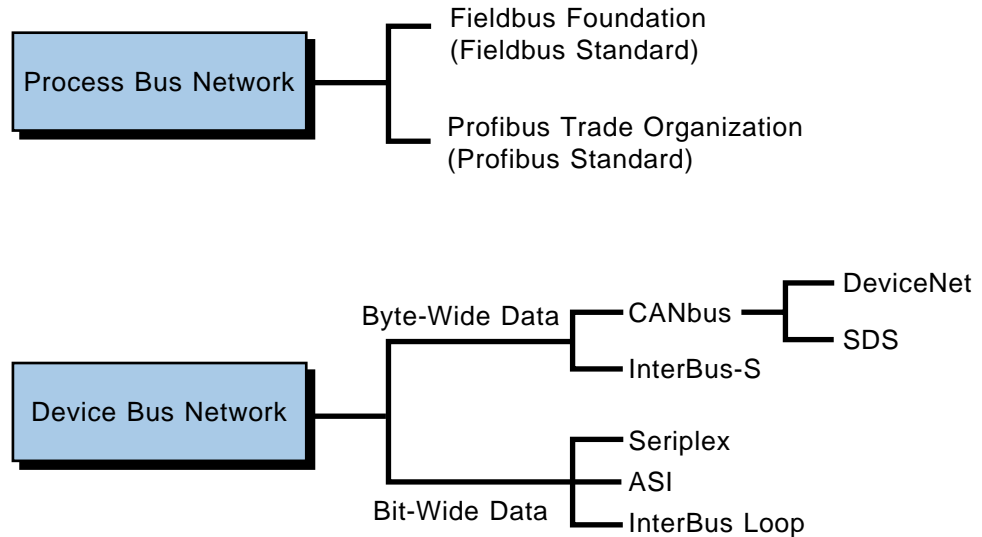

**Figure 6.** Network and protocol standards.

Although no proclaimed standards exist for device bus network applications, several de facto standards are emerging due to the availability of company-specific protocol specifications from device bus network manufacturers. These network manufacturers or associations provide I/O field device manufacturers with specifications in order to develop an open network architecture, (i.e., a network that can interface with many types of field devices). In this way, each manufacturer hopes to make its protocol the industry standard. One of these de facto standards for the byte-wide device bus network is DeviceNet, originally from PLC manufacturer Allen-Bradley and now provided by an independent spin-off association called the Open DeviceNet Vendor Association. Another is SDS (Smart Distributed System) from Honeywell. Both of these device bus protocol standards are based on the control area network bus (CANbus), developed for the automobile industry, which uses the commercially available CAN chip in its protocol. InterBus-S from Phoenix Contact is another emerging de facto standard for byte-wide device bus network.

The de facto standards for low-end, bit-wide device bus networks include Seriplex, developed by Square D, and ASI (Actuator Sensor Interface), a standard developed by a consortium of European companies. Again, this is why I/O bus network and field device manufacturers will specify compatibility with a particular protocol (e.g., ASI, Seriplex, InterBus-S, SDS, or DeviceNet) even though no official protocol standard exists.

### 3 ADVANTAGES OF I/O BUS NETWORKS

Although device bus networks interface mostly with discrete devices and process bus networks interface mostly with complex analog devices, they both transmit information the same way—digitally. In fact, the need for

digital communication was one of the major reasons for the establishment of I/O bus networks. Digital communication allows more than one field device to be connected to a wire due to addressing capabilities and the device's ability to recognize data. In digital communication, a series of 1s and 0s is serially transmitted through a bus, providing important process, machine, and field device information in a digital format. These digital signals are less susceptible than other types of signals to signal degradation caused by electromagnetic interference (EMI) and radio frequencies generated by analog electronic equipment in the process environment. Additionally, PLCs in an I/O bus perform a minimal amount of analog-to-digital and digital-to-analog conversions, since the devices pass their data digitally through the bus to the controller. This, in turn, eliminates the small, but cumulative, errors caused by A/D and D/A conversions.

Another advantage of digital I/O bus communication is that, because of their intelligence, process bus-compatible field devices can pass a digital value proportional to a real-world value to the PLC, thus eliminating the need to linearize or scale the process data. For example, a flow meter can pass data about a 535.5 gallons per minute flow directly to the PLC instead of sending an analog value to an analog module that will then scale the value to engineering units. Thus, the process bus is an attempt to eliminate the need for the interpretation of analog voltages and 4–20 mA current readings from process field devices.


The advantages of digital communication in I/O bus networks are enormous. However, I/O bus networks have physical advantages as well. The reduction in the amount of wiring in a plant alone can provide incredible cost savings for manufacturing and process applications.

## 4 DEVICE BUS NETWORKS

### BYTE-WIDE DEVICE BUS NETWORKS

The most common byte-wide device bus networks are based on the InterBus-S network and the CANbus network. As mentioned previously, the CANbus network includes the DeviceNet and SDS bus networks.


**InterBus-S Byte-Wide Device Bus Network.** InterBus-S is a sensor/actuator device bus network that connects discrete and analog field devices to a PLC or computer (soft PLC) via a ring network configuration. The InterBus-S has built-in I/O interfaces in its 256 possible node components, which also include terminal block connections for easy I/O interfacing (see Figure 7). This network can handle up to 4096 field I/O devices (depending on the configuration) at a speed of 500 kbaud with cyclic redundancy check (CRC) error detection.

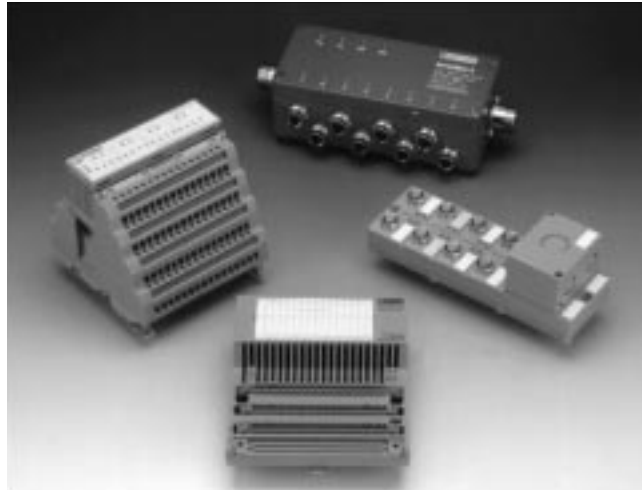

Courtesy of Phoenix Contact, Harrisburg, PA


**Figure 7.** InterBus-S I/O block interfaces.

A PLC or computer in an InterBus-S network communicates with the bus in a master/slave method via a host controller or module (see Figure 8). This host controller has an additional RS-232C connector, which allows a laptop computer to be interfaced to the network to perform diagnostics. The laptop computer can run CMD (configuration, monitoring, and diagnostics) software while the network is operating to detect any transmission problems. The software detects any communication errors and stores them in a time-stamped file, thus indicating when possible interference might have taken place. Figure 9 illustrates a typical InterBus-S network with a host controller interface to a PLC.

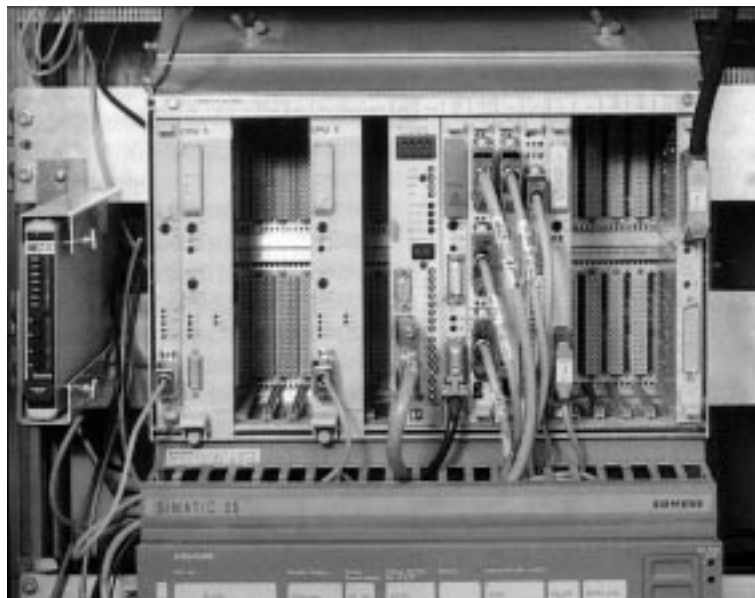

Courtesy of Phoenix Contact, Harrisburg, PA

**Figure 8.** InterBus-S I/O network interface connected to a Siemens PLC.

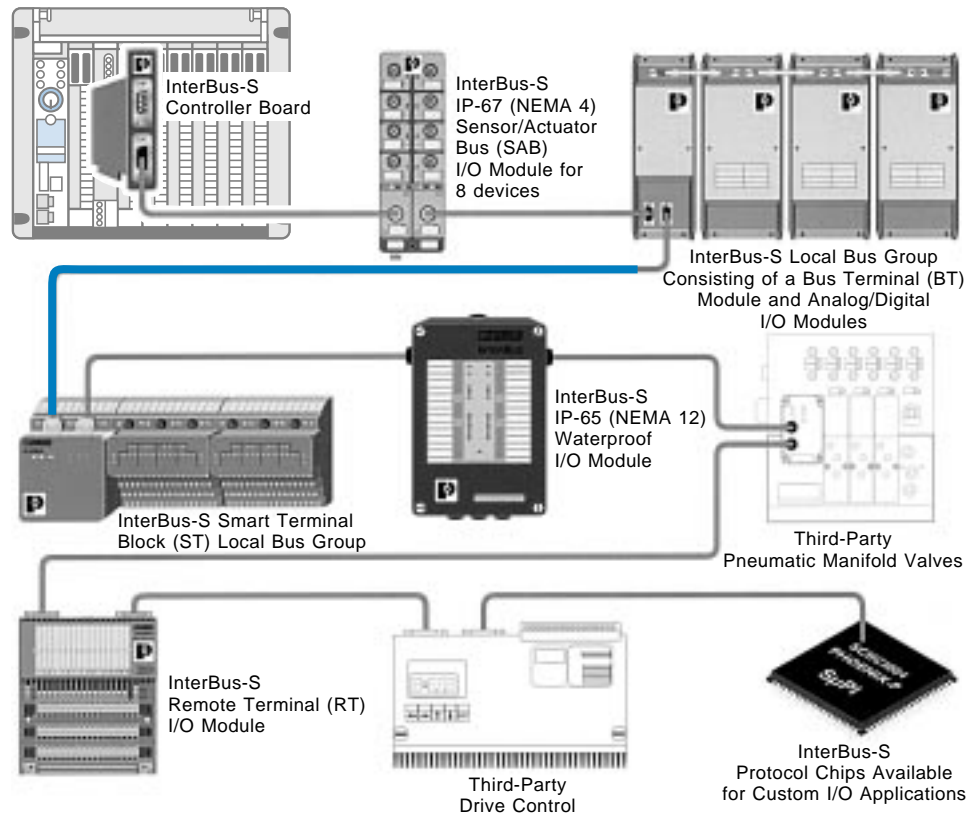

**Figure 9.** An InterBus-S network with a host controller interface to a PLC.

I/O device addresses in an InterBus-S network are automatically determined by their physical location, thus eliminating the need to manually set addresses. The host controller interface continuously scans data from the I/O devices, reading all the inputs in one scan and subsequently writing output data. The network transmits this data in *frames*, which provide simultaneous updates to all devices in the network. The InterBus-S network ensures the validity of the data transmission through the CRC error-checking technique. Table 1 lists some of the features and benefits of the InterBus-S device bus network. Note that this network uses the first, second, and seventh layers—the physical, data link, and application layers, respectively—of the ISO OSI reference model.

**CANbus Byte-Wide Device Bus Networks.** CANbus networks are byte-wide device bus networks based on the widely used CAN electronic chip technology, which is used inside automobiles to control internal components, such as brakes and other systems. A CANbus network is an open protocol system featuring variable length messages (up to 8 bytes), nondestructive arbitration, and advanced error management. A four-wire cable plus shield—two wires for power, two for signal transmission, and a “fifth” shield wire—



Network Characteristics	InterBus-S Features	User Benefits
<b>Physical Layer (Layer 1):</b> Protocol structure Distance Physical media	Hardware ring network Inherently distributed up to 42,000 feet Cabeling options allow for twisted-pair, fiber-optic, slipring, infrared, or SMG connections	Self-configuring, no network addresses to set Significantly lowers system installation cost Network connections can be made in all types of industrial environments
<b>Data Link Layer (Layer 2):</b> Protocol transmission Protocol arbitration Throughput Error checking	Full-duplex, total frame transmission No arbitration Read and write up to 4096 digital inputs and outputs in under 14 msec CRC error checking between every network connection	All network I/O updated simultaneously All data is transmitted continuously without any interruptions Updates I/O many times faster than the application logic can be solved Accurate, reliable data transmissions
<b>Application Layer (Layer 3):</b> Diagnostics Protocol flexibility I/O expandability	Pinpoints the cause and location of network problems Supports high-speed digital data, analog data, and client-server messaging Connects up to 256 I/O drops for a total of 4096 digital input and 4096 digital output points or a combination of digital and analog signal types	More uptime, less downtime, reduced maintenance cost, improved reliability Achieves maximum control Provides greater system flexibility
<b>Connectivity:</b> Openness Standards	Over 300 third-party manufacturers provide compatible products DIN standard 19258 with profiles for robotics, drives, process controllers, encoders, and operator interfaces	Standard analog and digital I/O signal types and the widest variety of form factors available to provide optimum system flexibility for tomorrow's manufacturing requirements Greater system integrity

**Table 1.** Features and benefits of the InterBus-S network.

provides the communication link with field devices (see Figure 10). This communication can either be master/slave or peer to peer. The speed of the network (data transmission rate) depends on the length of the trunk cable. Table 2 illustrates speed-versus-length tables for the DeviceNet and SDS CANbus networks.

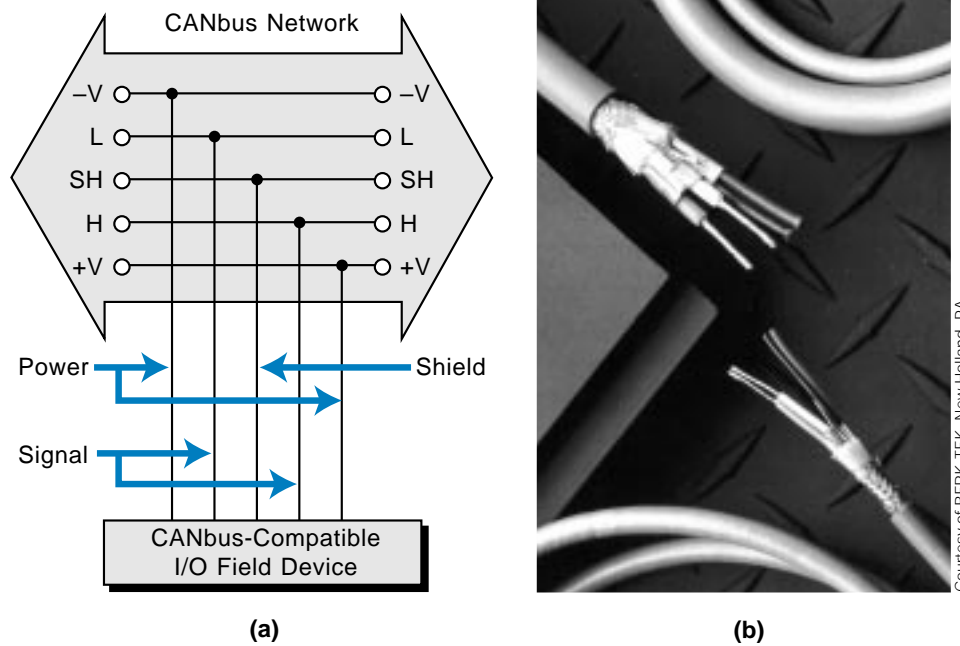



Figure 10. (a) A CANbus communication link and (b) a CANbus four-wire cable.

	Distance		Transmission Rate
	Meters	Feet	
(a)	500	1640	125K bits/sec
	200	656	250K bits/sec
	100	328	500K bits/sec

	Maximum Total Cable Trunk Length (ft.)	Data Rate (bits/second)
	(b)	1600
800		250 kbaud
400		500 kbaud
100		1000 kbaud (1Mb)

Table 2. Speed-versus-length tables for (a) DeviceNet and (b) SDS CANbus networks.

The DeviceNet byte-wide network can support 64 nodes and a maximum of 2048 field I/O devices. The SDS network can also support 64 nodes; however, this number increases to 126 addressable locations when multiport I/O interfaces are used to multiplex the nodes. Using a 4-to-1 multiport I/O interface module, an SDS network can connect to up to 126 nonintelligent I/O devices in any combination of inputs and outputs. Figure 11 shows this multiplexed configuration. This multiport interface to nonintelligent field devices contains a slave CAN chip inside the interface, which provides status information about the nodes connected to the interface. In a DeviceNet network, the PLC connects to the field devices in a trunkline configuration, with either single drops off the trunk or branched drops through multiport interfaces at the device locations.

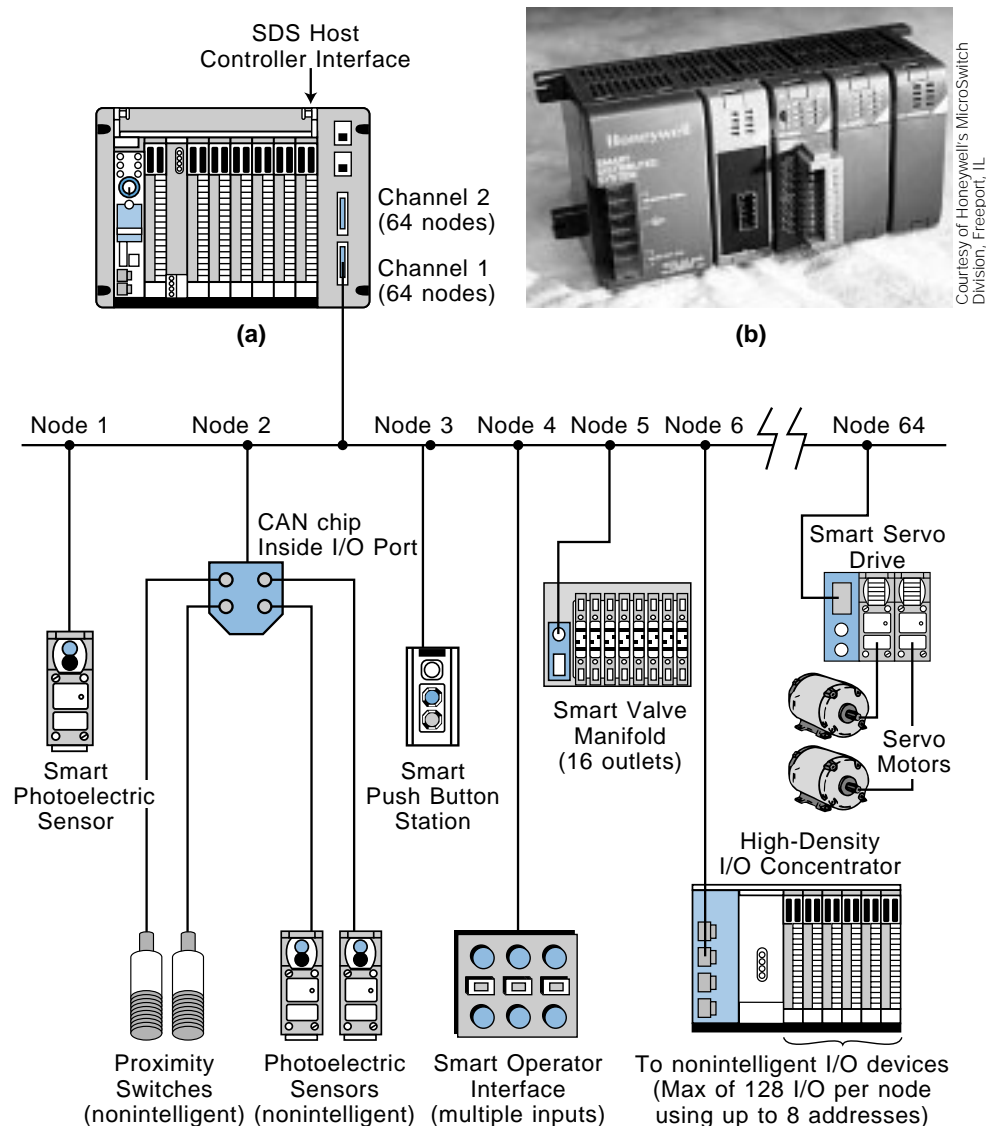


**Figure 11.** (a) A multiplexed SDS network and (b) a high-density I/O concentrator.

Because an SDS network can transmit many bytes of information in the form of variable length messages, it can also support many intelligent devices that can translate one, two, or more bytes of information from the network into 16 or 32 bits of ON/OFF information. An example of this type of intelligent device is a solenoid valve manifold. This kind of manifold can have up to 16 connections, thereby receiving 16 bits (two bytes) of data from the network and controlling the status of 16 valve outputs. However, this device uses only one address of the 126 possible addresses. Thus, in this configuration, the SDS network can actually connect to more than just 126 addressable devices.

The CANbus device bus network uses three of the ISO layers (see Figure 12) and defines both the media access control method and the physical signaling of the network, while providing cyclic redundancy check (CRC) error detection. The media access control function determines when each device on the bus will be enabled.

A CANbus scanner or an I/O processor provides the interface between a PLC and a CANbus network. Figure 13 illustrates a CANbus scanner designed for Allen-Bradley's DeviceNet network, which has two channels with up to 64 connected devices per channel. Block transfer instructions in the control program pass information to and from the scanner's processor (see Figure 14). The scanner converts the serial data from the CANbus network to a form usable by the PLC processor.

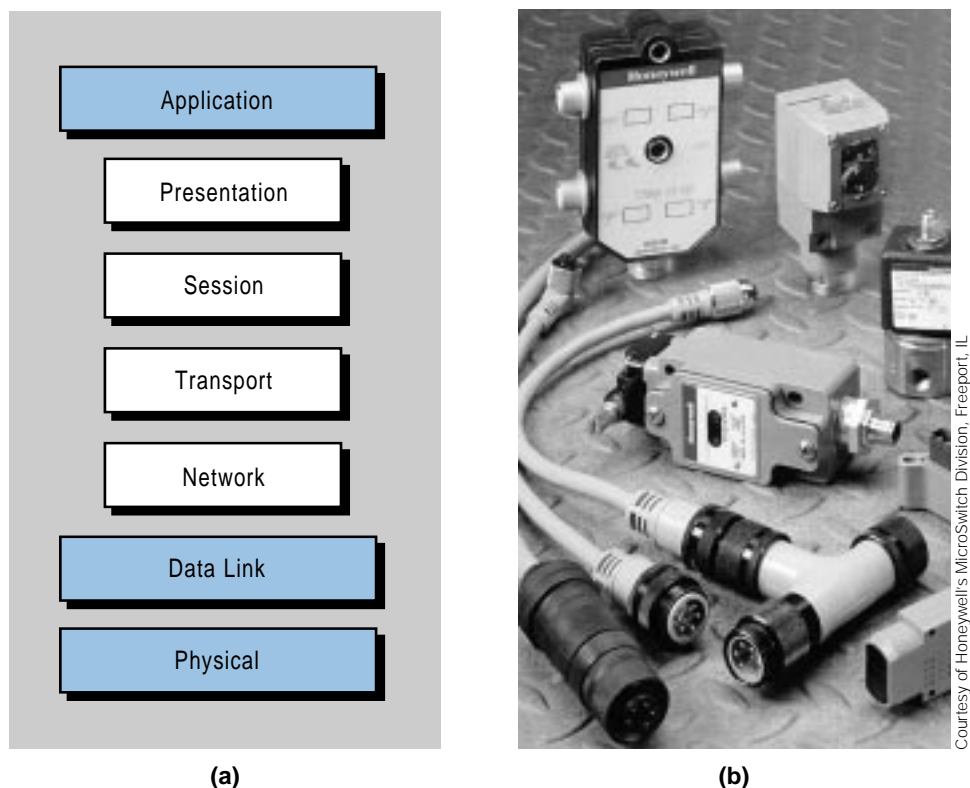

**Figure 12.** (a) CANbus ISO layers and (b) typical components and devices that connect and support the CANbus (SDS) layers.

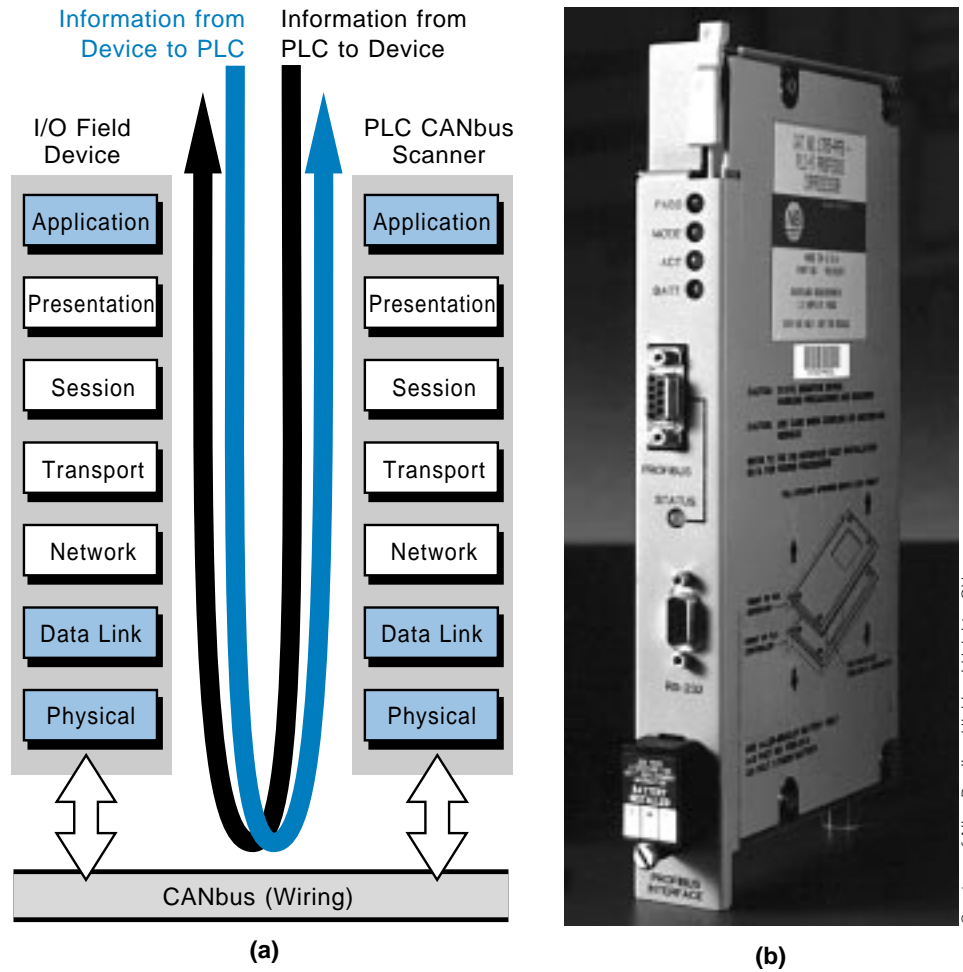


Figure 13. (a) Information transfer through a CANbus network and (b) Allen-Bradley's CANbus DeviceNet scanner.

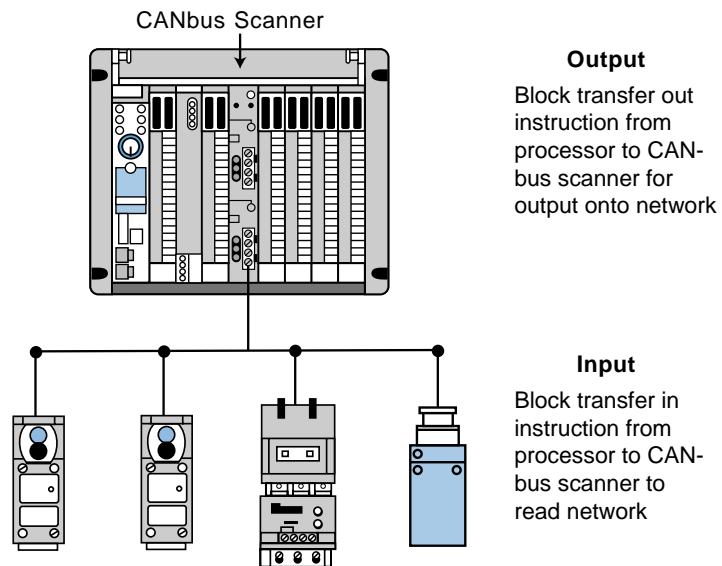



Figure 14. Block transfer instructions used to pass information to a CANbus scanner.

As mentioned earlier, the SDS CANbus network can handle 126 addressable I/O devices per network per channel. To increase the number of connectable devices, a PLC or computer bus interface module with two channels can be used to link two independent networks for a total of 252 I/O addresses. Moreover, each address can be multiplexed, making the network capable of more I/O connections. If the application requires even more I/O devices, another I/O bus scanner can be connected to the same PLC or computer to implement another set of networks. The SDS CANbus network connects the PLC and field devices in the same way as a DeviceNet network—in a trunkline configuration.

Some manufacturers provide access to remote I/O systems via a CANbus with an I/O rack/CANbus remote processor. Figure 15 illustrates an example of this type of configuration using Allen-Bradley's Flex I/O system with a DeviceNet processor, thus creating a DeviceNet I/O subsystem.

### BIT-WIDE DEVICE BUS NETWORKS

Bit-wide device bus networks are used for discrete applications with simple ON/OFF devices (e.g., sensors and actuators). These I/O bus networks can only transmit 4 bits (one nibble) of information at a time, which is sufficient to transmit data from these devices. The smallest discrete sensors and

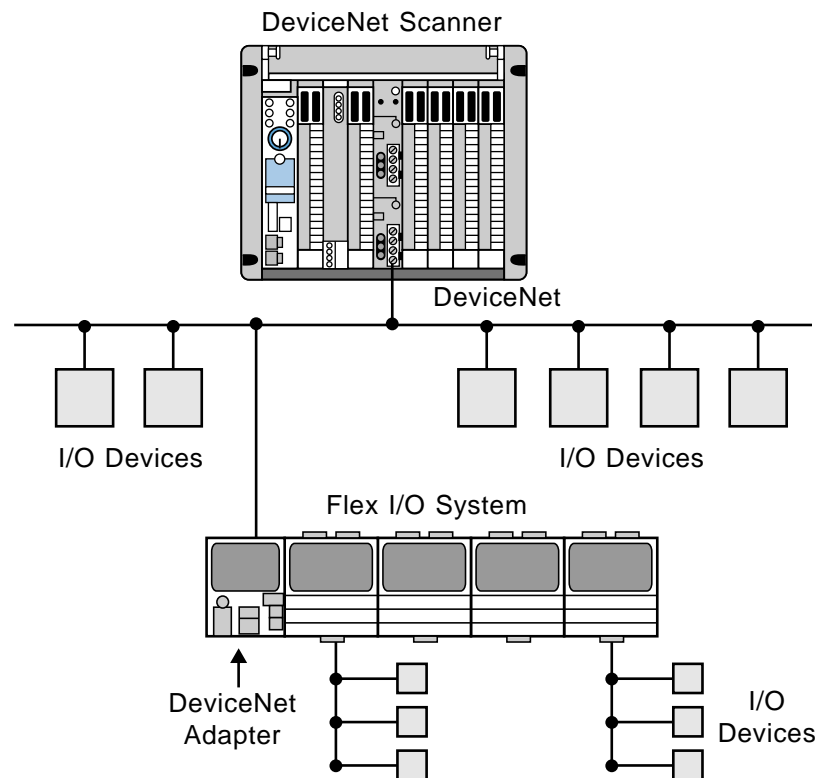


**Figure 15.** Flex I/O system connecting remote I/O to the DeviceNet processor.

actuators require only one bit of data to operate. By minimizing their data transmission capabilities, bit-wide device bus networks provide optimum performance at economical costs. The most common bit-wide device bus networks are ASI, InterBus Loop, and Seriplex.


**ASI Bit-Wide Device Bus Network.** The ASI network protocol is used in simple, discrete network applications requiring no more than 124 I/O field devices. These 124 input and output devices can be connected to up to 31 nodes in either a tree, star, or ring topology. The I/O devices connect to the PLC or personal computer via the bus through a host controller interface. Figure 16 illustrates an ASI bit-wide device bus network.

The ASI network protocol is based on the ASI protocol chip, thus the I/O devices connected to this type of network must contain this chip. Typical ASI-compatible devices include proximity switches, limit switches, photoelectric sensors, and standard off-the-shelf field devices. However, in an application using an off-the-shelf device, the ASI chip is located in the node (i.e., an intelligent node with a slave ASI chip), instead of in the device.

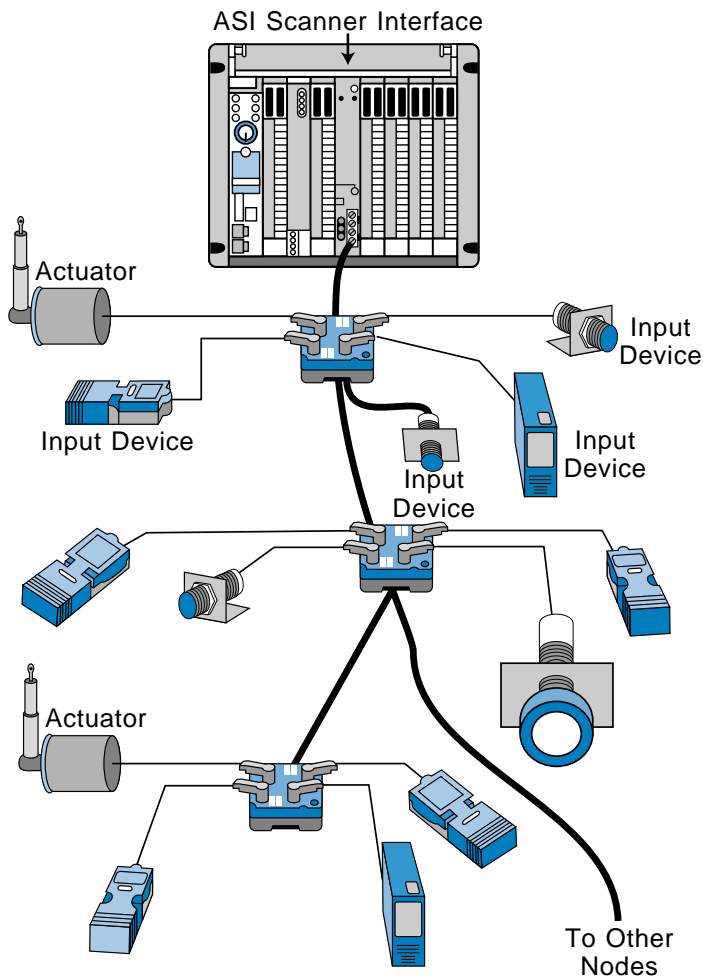

**Figure 16.** ASI bit-wide device bus network.

ASI networks require a 24-VDC power supply connected through a two-wire, unshielded, untwisted cable. Both data and power flow through the same two wires. The cycle time is less than 5 msec with a transfer rate of 167K bits/second. The maximum cable length is 100 meters (330 ft) from the master controller. Figure 17 illustrates an I/O bus network that uses both the ASI bit-wide network and the byte-wide CANbus network. Note that the ASI network connects to the byte-wide CANbus network through a gateway.

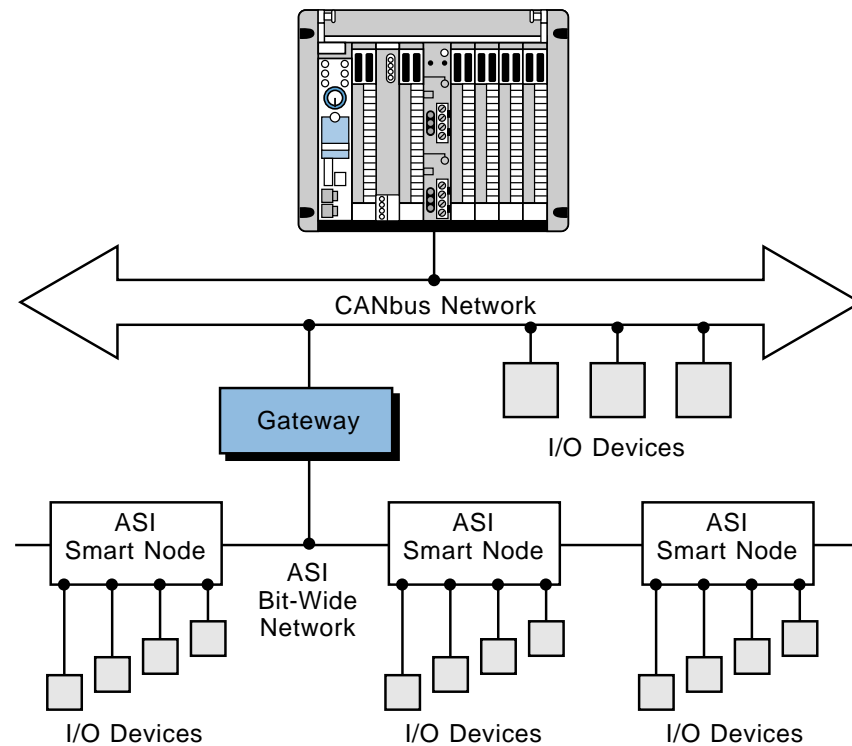


**Figure 17.** I/O bus network using the CANbus and ASI networks.

**InterBus Loop Bit-Wide Device Bus Network.** The InterBus Loop from Phoenix Contact Inc. is another bit-wide device bus network used to interface a PLC with simple sensor and actuator devices. The InterBus Loop uses a power and communications technology called PowerCom to send the InterBus-S protocol signal through the power supply wires (i.e., the protocol is modulated onto the power supply lines). This reduces the number of cables required by the network to only two conductors, which carry both the power and communication signals to the field devices.

Since the InterBus-S and InterBus Loop networks use the same protocol, they can communicate with each other via an InterBus Loop terminal module (see Figure 18). The InterBus Loop connects to the bus terminal module, located in the InterBus-S network, which attaches to the field devices via two wires. An InterBus Loop network can also interface with nonintelligent, off-the-shelf devices by means of module interfaces containing an intelligent slave network chip.




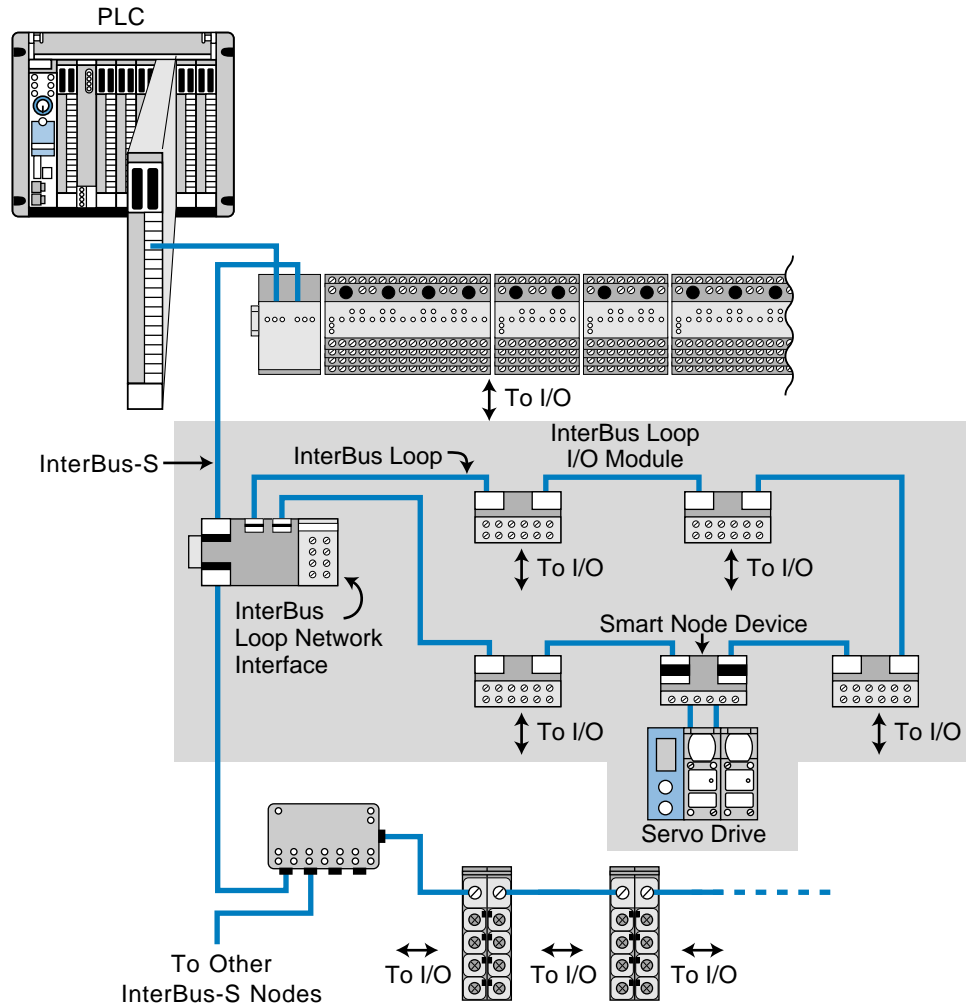

**Figure 18.** InterBus Loop and InterBus-S networks linked by an InterBus Loop terminal module.


**Seriplex Bit-Wide Device Bus Network.** The Seriplex device bus network can connect up to 510 field devices to a PLC in either a master/slave or peer-to-peer configuration. The Seriplex network is based on the application-specific integrated circuit, or ASIC chip, which must be present in all I/O field devices that connect to the network. I/O devices that do not have the ASIC chip embedded in their circuitry (i.e., off-the-shelf devices) can connect to the network via a Seriplex I/O module interface that contains a slave ASIC chip. The ASIC I/O interface contains 32 built-in Boolean logic function used to create logic that will provide the communication, addressability, and intelligence necessary to control the field devices connected to the network bus (see Figure 19).

A Seriplex network can span distances of up to 5,000 feet in a star, loop, tree, or multidrop configuration. This bit-wide bus network can also operate without a host controller. Unlike the ASI network, the Seriplex device bus

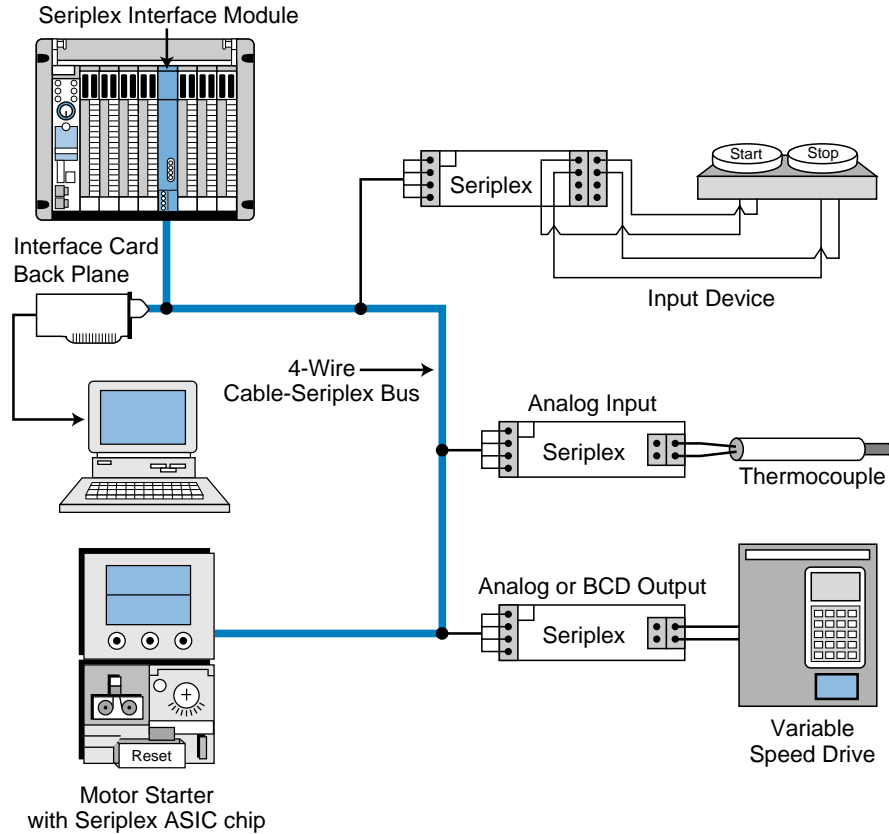

**Figure 19.** Seriplex bus network with a controller.

network can interface with analog I/O devices; however, the digitized analog signal is read or written one bit at a time in each scan cycle. Figure 20 illustrates a typical Seriplex bus network without a controller.

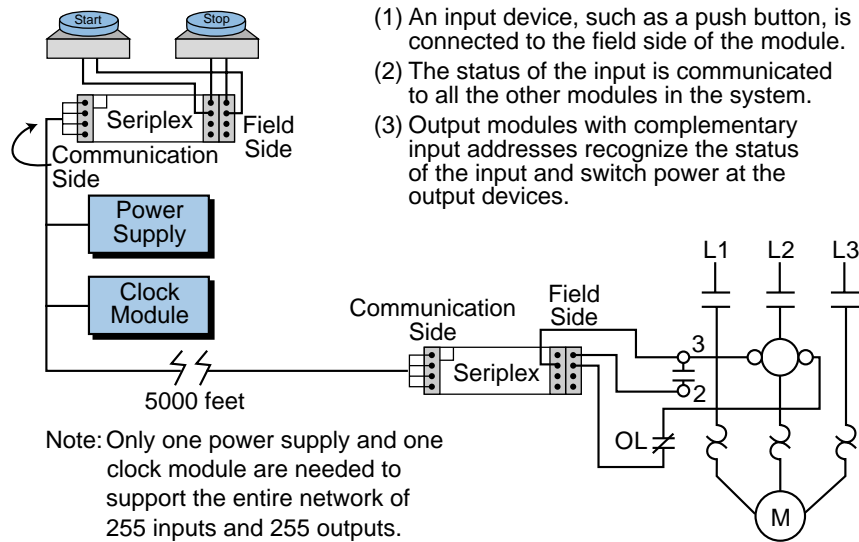


- (1) An input device, such as a push button, is connected to the field side of the module.
- (2) The status of the input is communicated to all the other modules in the system.
- (3) Output modules with complementary input addresses recognize the status of the input and switch power at the output devices.

**Figure 20.** Seriplex I/O module interface without a controller.

## 5 PROCESS BUS NETWORKS

A process bus network is a high-level, open, digital communication network used to connect analog field devices to a control system. As mentioned earlier, a process bus network is used in process applications, where the analog input/output sensors and actuators respond slower than those in discrete bus applications (device bus networks). The size of the information packets delivered to and from these analog field devices is large, due to the nature of the information being collected at the process level.

The two most commonly used process bus network protocols are Fieldbus and Profibus (see Section 2). Although these network protocols can transmit data at a speed of 1 to 2 megabits/sec, their response time is considered slow to medium because of the large amount of information that is transferred. Nevertheless, this speed is adequate for process applications, because analog processes do not respond instantaneously, as discrete controls do. Figure 21 illustrates a typical process bus configuration.

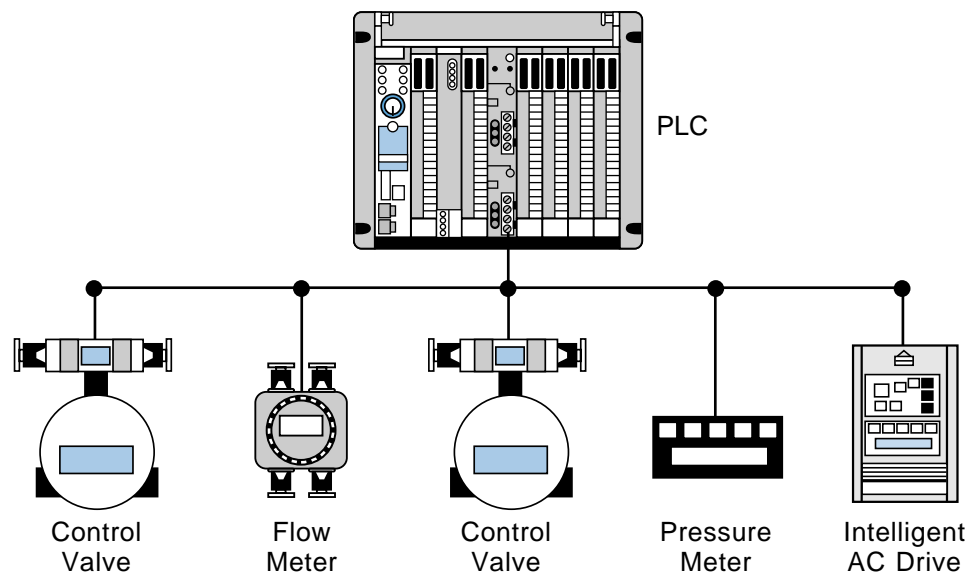

**Figure 21.** Process bus configuration.

Process bus networks can transmit enormous amounts of information to a PLC system, thus greatly enhancing the operation of a plant or process. For example, a smart, process bus-compatible motor starter can provide information about the amount of current being pulled by the motor, so that, if current requirements increase or a locked-rotor current situation occurs, the system can alert the operator and avoid a potential motor failure in a critical production line. Implementation of this type of system without a process bus network would be too costly and cumbersome because of the amount of wire runs necessary to transmit this type of process data.

Process bus networks will eventually replace the commonly used analog networks, which are based on the 4–20 mA standard for analog devices. This will provide greater accuracy and repeatability in process applications, as well as add bidirectional communication between the field devices and the controller (e.g., PLC). Figure 22 illustrates an intelligent valve/manifold system that can be used in a process bus network.



Courtesy of FESTO Corp., Hauppauge, NY

**Figure 22.** Intelligent valve/manifold system compatible with the Fieldbus protocol.

A PLC or computer communicates with a process bus network through a host controller interface module using either Fieldbus or Profibus protocol format. Block transfer instructions relay information between the PLC and the process bus processor. The process bus processor is generally inserted inside the rack enclosure of the PLC. Figure 23 shows a PLC with a Profibus processor communication interface.



Courtesy of Siemens, Alpharetta, GA

**Figure 23.** Siemens' Simatic 505 PLC with an integrated Profibus-DP interface.

## FIELDBUS PROCESS BUS NETWORK


The Fieldbus process bus network from the Fieldbus Foundation (FF) is a digital, serial, multiport, two-way communication system that connects field equipment, such as intelligent sensors and actuators, with controllers, such as PLCs. This process bus network offers the desirable features inherent in 4–20 mA analog systems, such as:

- a standard physical wiring interface
- bus-powered devices on a single pair of wires
- intrinsic safety options

However, the Fieldbus network technology offers the following additional advantages:

- reduced wiring due to multidrop devices
- compatibility among Fieldbus equipment
- reduced control room space requirements
- digital communication reliability

**Fieldbus Protocol.** The Fieldbus network protocol is based on three layers of the ISO's seven-layer model (see Figure 24). These three layers are layer 1 (physical interface), layer 2 (data link), and layer 7 (application). The section comprising layers 2 and 7 of the model are referred to as the Fieldbus *communication stack*. In addition to the ISO's model, Fieldbus adds an extra

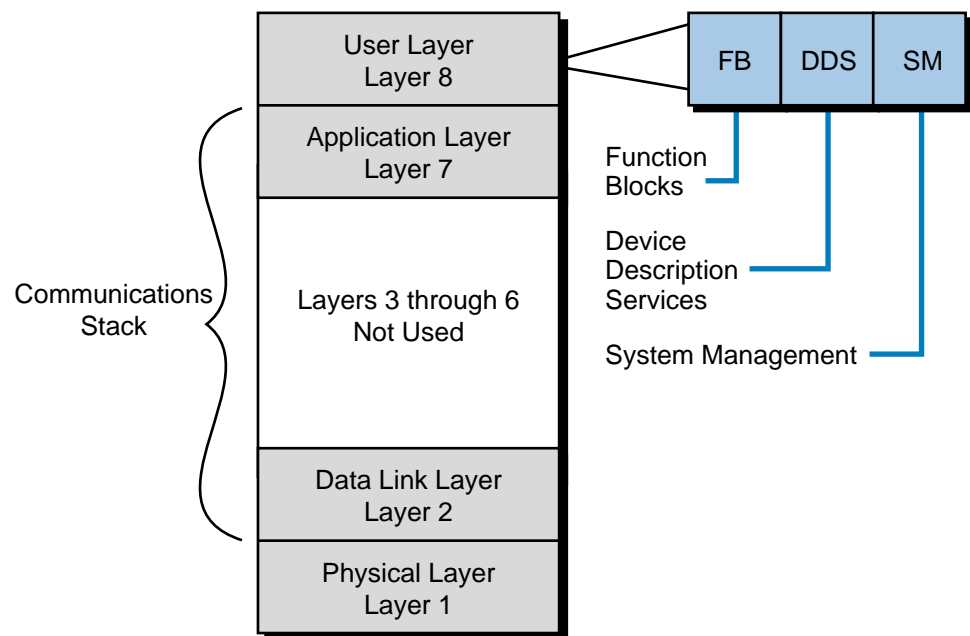


**Figure 24.** Fieldbus protocol.

layer on top of the application layer called the *user layer*. This user layer provides several key functions, which are function blocks, device description services, and system management.

**Physical Layer (Layer 1).** The physical layer of the Fieldbus process bus network conforms with the ISA SP50 and IEC 1152-2 standards. These standards specify the type of wire that can be used in this type of network, as well as how fast data can move through the network. Moreover, these standards define the number of field devices that can be on the bus at different network speeds, with or without being powered from the bus with *intrinsic safety* (IS). Intrinsically safe equipment and wiring does not emit enough thermal or electrical energy to ignite materials in the surrounding atmosphere. Thus, intrinsically safe devices are suitable for use in hazardous environments (e.g., those containing hydrogen or acetylene).

Table 3 lists the specifications for the Fieldbus network's physical layer, including the type of wire (bus), speed, number of devices, and wiring characteristics. The Fieldbus has two speeds—a low speed of 31.25 kbaud, referred to as H1, and a high speed of 1 Mbaud or 2.5 Mbaud (depending on the mode—AC current or DC voltage mode), called H2. Figure 25 illustrates how a bridge can connect an H1 Fieldbus network to an H2 Fieldbus network.

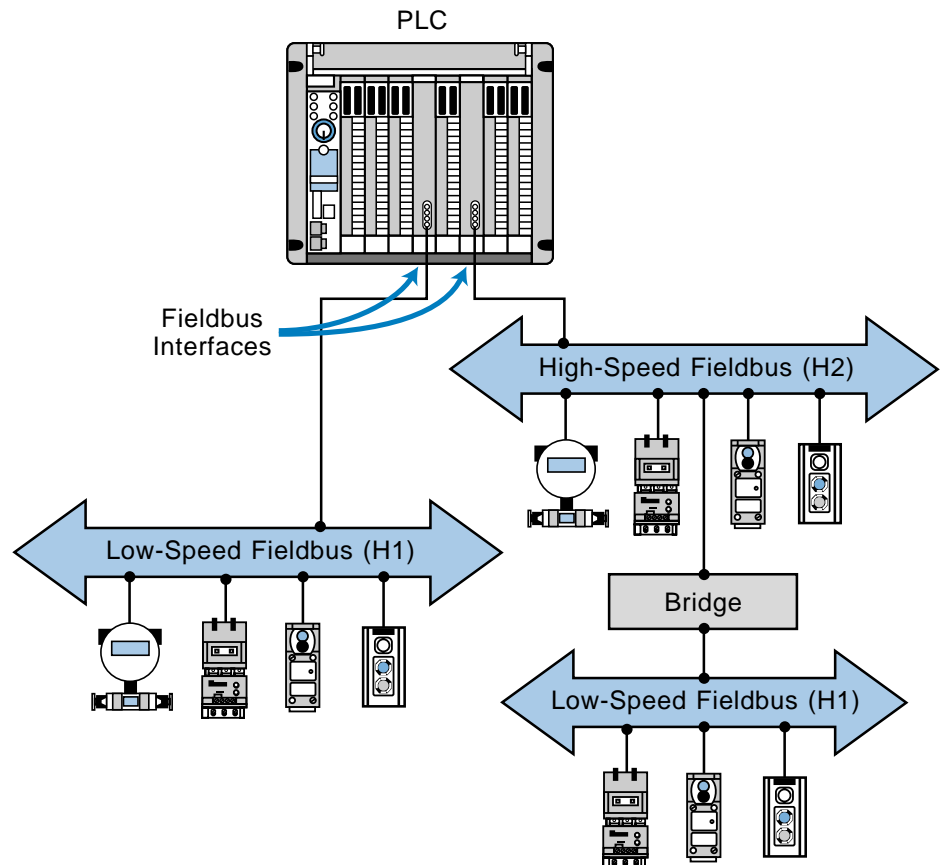

**Figure 25.** Bridge connecting low-speed and high-speed Fieldbus networks.

Bus Type	Speed	Number of Devices/ Fieldbus Segment	Type of Wire	
			New Bus Segment (Shielded/Twisted-Pair)	Existing Bus Segment (Shielded/Multitwisted Pair)
Low-speed bus (H1)	31.25 kbaud	2–32 devices that are not bus powered 2–12 devices that are bus powered 2–6 devices that are bus powered in an intrinsically safe (IS) area	#18 AWG, up to 1900 m*	#22 AWG, up to 1200 m
	1 Mbaud	127 devices, AC current mode (16 KHz frequency), powered from bus in IS area	#22 AWG, up to 750 m	
	1 Mbaud	127 devices, DC voltage mode, not powered from bus, and no IS devices	#22 AWG, up to 750 m	
High-speed bus (H2)	2.5 Mbaud	127 devices, DC voltage mode, not powered from bus, and no IS devices	#22 AWG, up to 500 m	
	*A Fieldbus low-speed bus (H1) can also be implemented using unshielded, multitwisted wired with #26 AWG at up to 400 m. The low-speed bus can also use unshielded, multicore wire with #16 AWG at up to 200 m.			

**Table 3.** Fieldbus physical layer specifications.

At a speed of 31.25 kbaud, the physical layer of the Fieldbus process network can support existing 4–20 mA wiring. This increases cost-effectiveness when upgrading a plant or process's network communication scheme. At this H1 speed, the Fieldbus network can also support intrinsically safe network segments with bus-powered devices.

**Communication Stack (Layers 2 and 7).** The communication stack portion of the Fieldbus process bus network consists of layer 2 (the data link layer) and layer 7 (the application layer). The data link layer controls the transmission of messages onto the Fieldbus through the physical layer. It manages access to the bus through a *link active scheduler*, which is a deterministic, centralized bus transmission regulator based on IEC and ISA standards. The application layer contains the *Fieldbus messaging specification* (FMS) standard, which encodes and decodes commands from the user layer, Fieldbus's additional 8th layer. The FMS is based on the Profibus process bus standard. Layer 7 also contains an *object dictionary*, which allows Fieldbus network data to be retrieved by either tag name or index record.

The Fieldbus process network uses two types of message transmissions: **cyclic** (scheduled) and **acyclic** (unscheduled). Cyclic message transmissions occur at regular, scheduled times. The master network device monitors how busy the network is and then grants the slave devices permission to send network transmissions at specified times. Other network devices can listen to and receive these messages if they are subscribers.

Acyclic, or unscheduled, messages occur between cyclic, scheduled messages, when the master device sends an unscheduled informational message to a slave device. Typically, acyclic messages involve alarm acknowledgment signals or special retrieving commands designed to obtain diagnostic information from the field devices.


**User Layer (Layer 8).** The user layer implements the Fieldbus network's distributed control strategy. It contains three key elements, which are function blocks, device description services, and system management. The user layer, a vital segment of the Fieldbus network, also defines the software model for user interaction with the network system.

**Function Blocks.** Function blocks are encapsulated control functions that allow the performance of input/output operations, such as analog inputs, analog outputs, PID control, discrete inputs/outputs, signal selectors, manual loaders, bias/gain stations, and ratio stations. The function block capabilities of Fieldbus networks allow Fieldbus-compatible devices to be programmed with blocks containing any of the instructions available in the system. Through these function blocks, users can configure control algorithms and implement them directly through field devices. This gives these intelligent field devices the capability to store and execute software routines right at



their connection to the bus. The process information gathered through these function block programs can then be passed to the host through the network, either cyclically or acyclically.

Figure 26 illustrates an example of a process control loop that is executed directly on the Fieldbus network. In this loop, the analog input function block reads analog process information from the meter/transmitter, executes a PID function block, and then outputs analog control data to an intelligent process valve. This configuration creates an independent, self-regulating loop, which obtains its own analog input data from the flow meter. Information about the required flow parameters is passed from the host controller to the intelligent valve system, so that it can properly execute its function blocks. The function blocks allow the field device to be represented in the network as a collection of software block instructions, rather than just as an instrument.

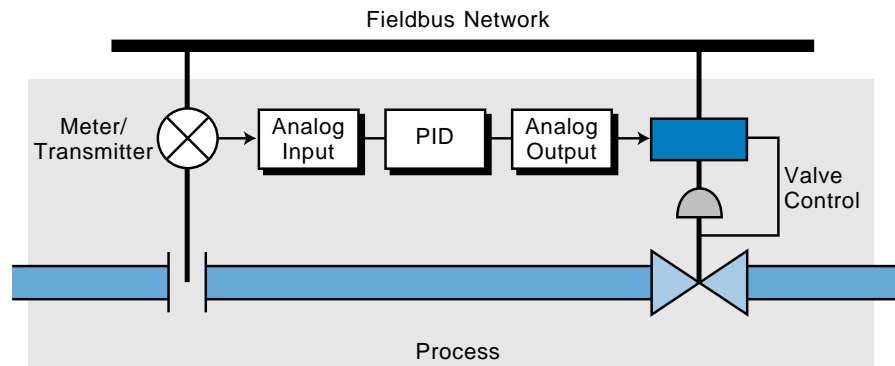

**Figure 26.** Process control loop executed on the Fieldbus network.

**Device Description Services.** *Device descriptions* (DD) are Fieldbus software mechanisms that let a host obtain message information, such as vendor name, available function blocks, and diagnostic capabilities, from field devices. Device descriptions can be thought of as “drivers” for field devices connected to the network, meaning that they allow the device to communicate with the host and the network. The network’s host computer uses a device description services, or DDS, interpreter to read the desired information from each device. All devices connected to a Fieldbus process network must have a device description. When a new field device is added to the network, the host must be supplied with its device description. Device descriptions eliminate the need to revise the whole control system software when revisions are made to existing field device software or when new devices are added to the process control system.

**System Manager.** The system management portion of the user layer schedules the execution of function blocks at precisely defined intervals. It also controls the communication of all the Fieldbus network parameters used by the function blocks. Moreover, the system manager automatically assigns field device addresses.

## PROFIBUS PROCESS BUS NETWORK

Profibus is a digital process bus network capable of communicating information between a master controller (or host) and an intelligent, slave process field device, as well as from one host to another. Profibus actually consists of three intercompatible networks with different protocols designed to serve distinctive application requirements. The three types of Profibus networks are:

- Profibus-FMS
- Profibus-DP
- Profibus-PA

The Profibus-FMS network is the universal solution for communicating between the upper level, the cell level, and the field device level of the Profibus hierarchy (see Figure 27). Cell level control occurs at individual (or

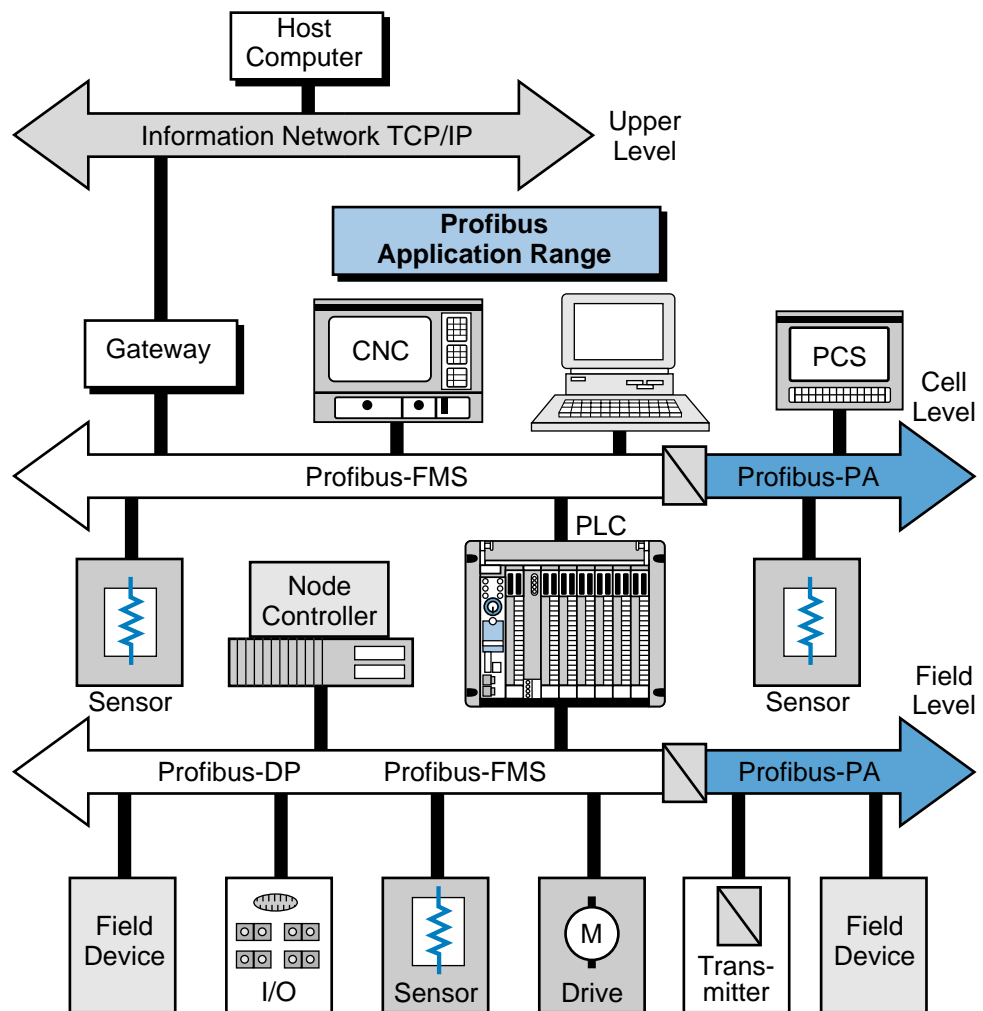



Figure 27. Profibus hierarchy.

cell) areas, which exercise the actual control during production. The controllers at the cell level must communicate with other supervisory systems. The Profibus-FMS utilizes the Fieldbus message specification (FMS) to execute its extensive communication tasks between hierarchical levels. This communication is performed through cyclic or acyclic messages at medium transmission speeds.

The Profibus-DP network is a performance-optimized version of the Profibus network. It is designed to handle time-critical communications between devices in factory automation systems. The Profibus-DP is a suitable replacement for 24-V parallel and 4–20 mA wiring interfaces.


The Profibus-PA network is the process automation version of the Profibus network. It provides bus-powered stations and intrinsic safety according to the transmission specifications of the IEC 1158-2 standard. The Profibus-PA network has device description and function block capabilities, along with field device interoperability.

**Profibus Network Protocol.** The Profibus network follows the ISO model; however, each type of Profibus network contains slight variations in the model's layers. The Profibus-FMS does not define layers 3 through 6; rather, it implements their functions in a lower layer interface (LLI) that forms part of layer 7 (see Figure 28). The Profibus-FMS implements the Fieldbus message specification (FMS), which provides powerful network communication services and user interfaces, in layer 7 as well.

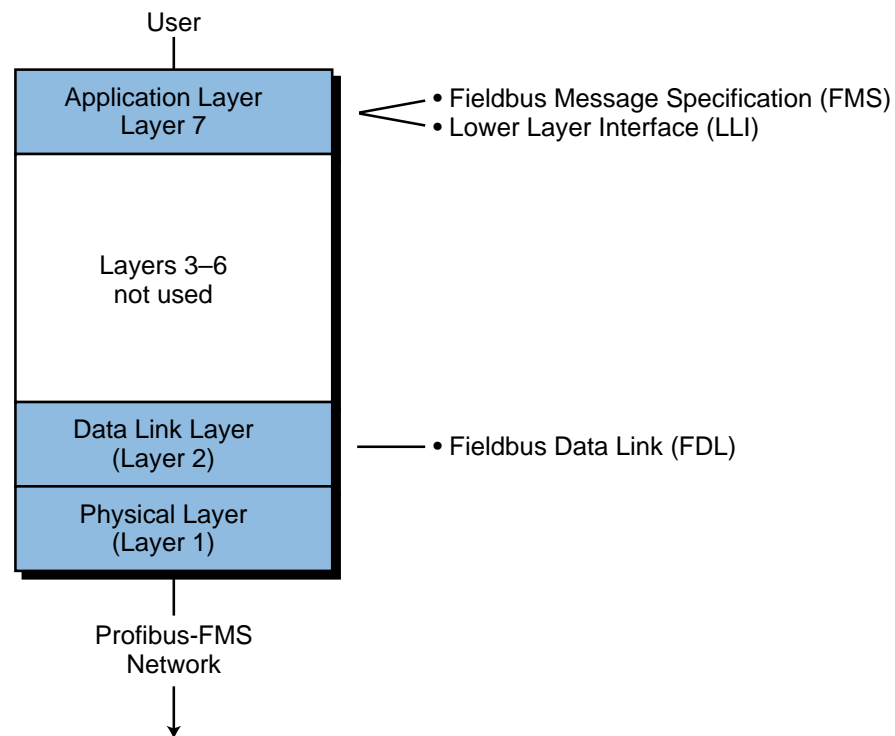

**Figure 28.** Profibus-FMS protocol.

The Profibus-DP network, on the other hand, does not define layers 3 through 7 (see Figure 29). It omits layer 7 primarily to achieve the high operational speed required for its applications. A *direct data link mapper* (DDL), located in layer 2, provides the mapping between the user interface and layer 2 of the Profibus-DP network.

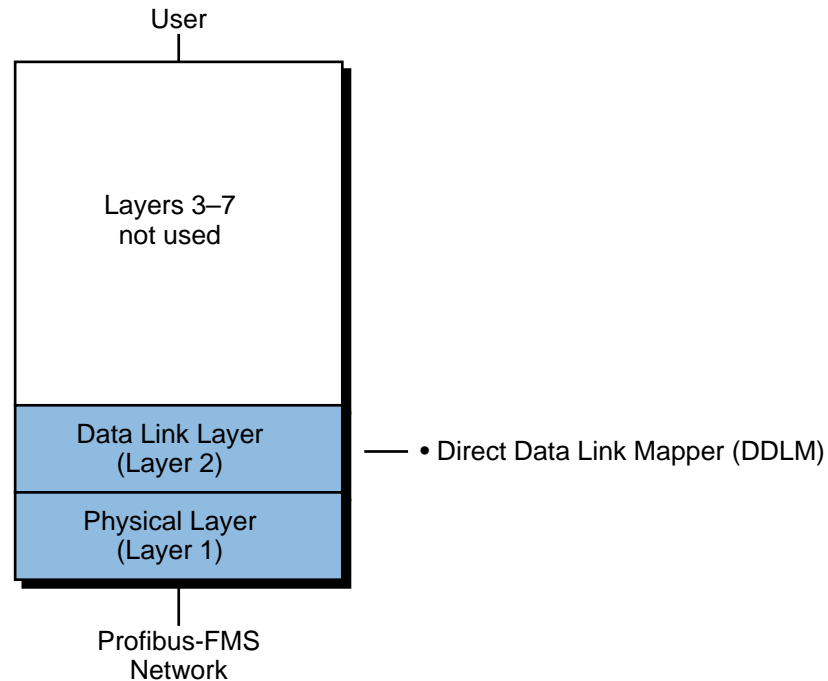


**Figure 29.** Profibus-DP protocol.

The Profibus-PA network uses the same type of model as the Profibus-FMS (see Figure 30), except its seventh layer differs slightly. Layer 7 implements the function block control software and also contains a device description language used for field device identification and addressing.


The data link layer, designated in the Profibus network as the *fieldbus data link layer* (FDL), executes all message and protocol transmissions. This data layer is equivalent to layer 2 of the ISO model. The fieldbus data link layer also provides **medium access control (MAC)** and data integrity. Medium access control ensures that only one station has the right to transmit data at any time. Because Profibus can communicate between masters with equal access rights (e.g., two PLCs), medium access control is used to provide each of the master stations with the opportunity to execute their communication tasks within precisely defined time intervals. For communication between a master and slave field devices, cyclic, real-time data exchange is achieved as quickly as possible through the network.

The Profibus's medium access protocol is a hybrid communication method that includes a token-passing protocol for use between masters and a master-slave protocol for communication between a master and a field device.

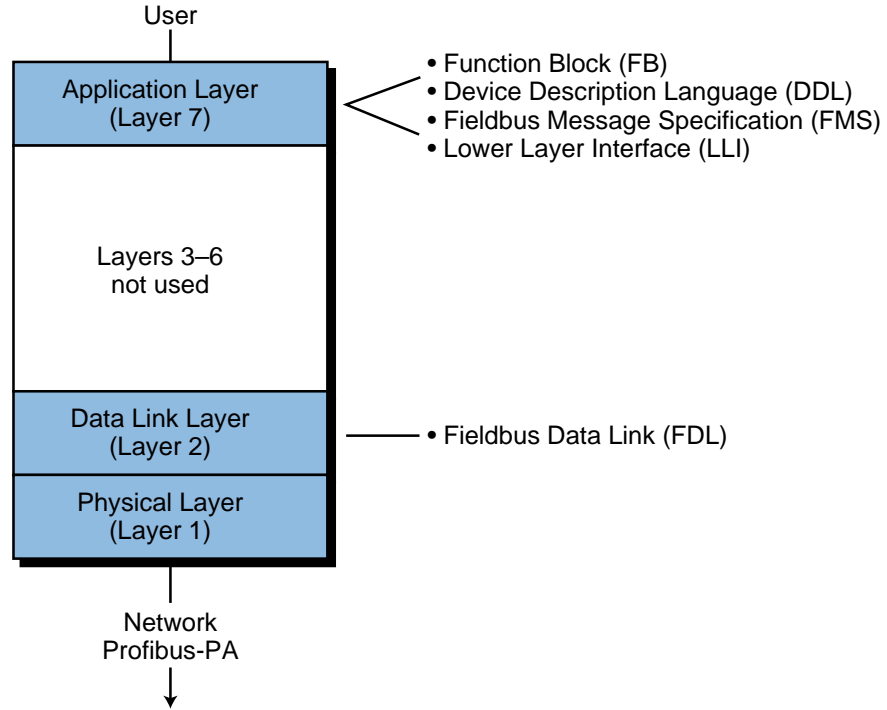

**Figure 30.** Profibus-PA protocol.

Through this hybrid medium access protocol, a Profibus network can function as a master-slave system, a master-master system (token passing), or a combination of both systems (see Figure 31).

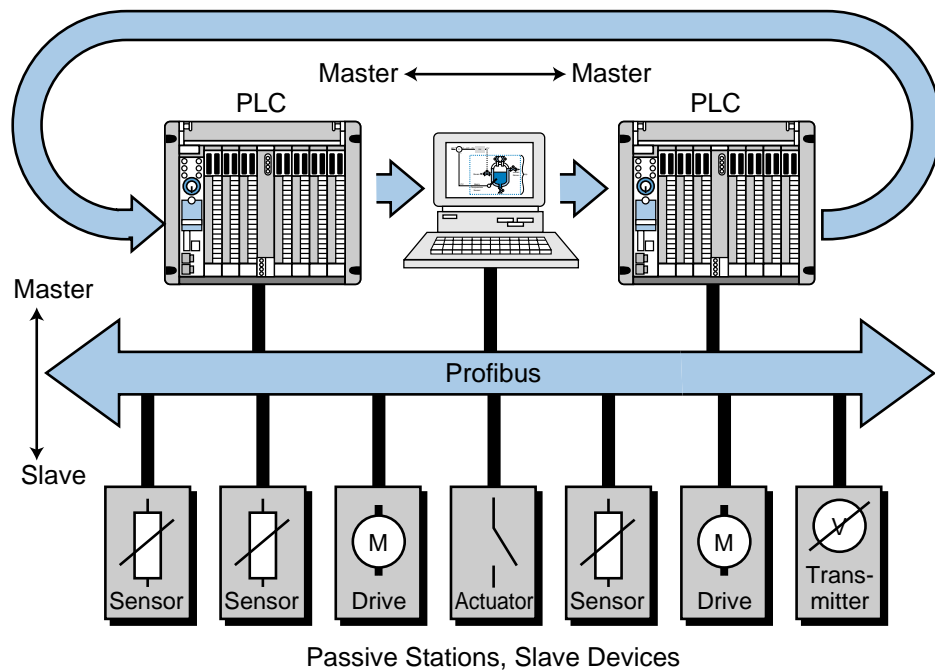

**Figure 31.** Master-slave and master-master Profibus communications.

As mentioned earlier, layer 2 of the Profibus network is responsible for data integrity, which is ensured through the Hamming Distance  $HD = 4$  error detection method. The Hamming distance method can detect errors in the transmission medium, as well as in the transceivers. As defined by the IEC 870-5-1 standard, this error detection method uses special start and end delimiters, along with slip-free synchronization and a parity bit for 8 bits.

Profibus networks support both peer-to-peer and multipoint communication in either broadcast or multicast configurations. In broadcast communication, an active station sends an unconfirmed message to all other stations. Any of these stations (including both masters and slaves) can take this information. In multicast communication, an active station sends an unconfirmed message to a particular group of master or slave stations.

The physical layer, or layer 1, of the ISO model defines the network's transmission medium and the physical bus interface. The Profibus network adheres to the EIA RS-485 standard, which uses a two-conductor, twisted-pair wire bus with optional shielding. The bus must have proper terminations at both ends. Figure 32 illustrates the pin assignment used in the Profibus. The maximum number of stations or device nodes per segment is 32 without repeaters and 127 with repeaters. The network transmission speed is selectable from 9.6 kbaud to 12 Mbaud, depending on the distance and cable type. Without repeaters, the maximum bus length is 100 m at 12 Mbaud. With conventional type-A copper bus cable, the maximum distance is 200 m at 1.5 Mbaud. This distance can be increased to up to 1.2 km if the speed of the network is reduced to 93.75 kbaud. With type-B cable, the maximum distance is 200 m at 500 kbaud and up to 1.2 km at 93.75 kbaud. The type of connector used is a 9-pin, D-sub connector.

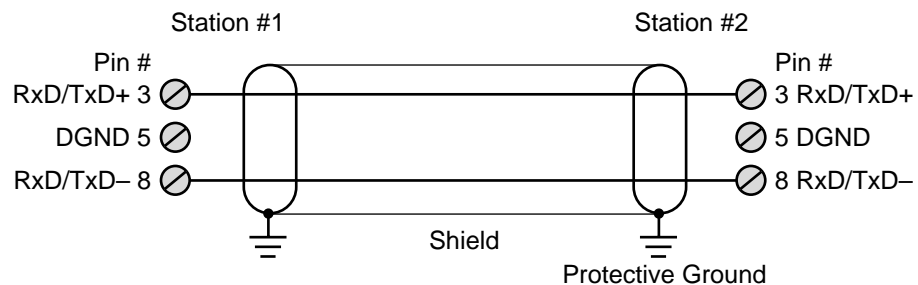



Figure 32. Profibus pin assignment.

## 6 I/O BUS INSTALLATION AND WIRING CONNECTIONS


### INSTALLATION GUIDELINES

One of the most important aspects of an I/O bus network installation is the use of the correct type of cable, number of conductors, and type of connectors for the network being used. In device bus networks, the number of conductors and

type of communication standard (i.e., RS-485, RS-422, etc.) varies depending on the specific network (e.g., DeviceNet, Seriplex, ASI, Profibus, Fieldbus, etc.). The connector ports (see Figure 33), which connect the I/O field devices to the I/O bus network, can be implemented in either an open or an enclosed configuration. Figure 34 illustrates the port connections for a DeviceNet I/O bus network.

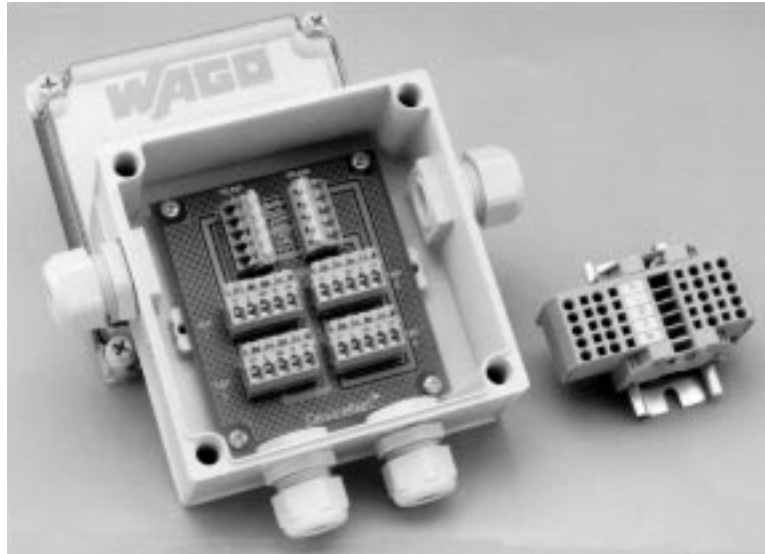

**Figure 33.** Connector ports from a DeviceNet bus network (left: enclosed, right: open).

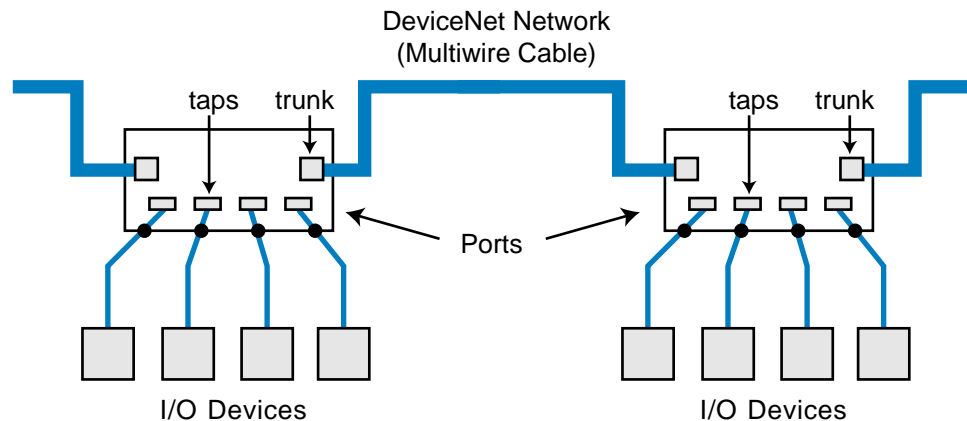


**Figure 34.** DeviceNet I/O bus port connections.


In general, an enclosed configuration can connect from 4 to 8 I/O field devices in one drop, while an open configuration can accommodate two to four I/O devices. Enclosed connector ports are used when the network must be protected from the environment, as in a NEMA 4-type enclosure. Open ports are used when replacing I/O connections in a system that already has a DIN rail installation, where the open ports can be easily mounted onto the rail.

## DEVICE BUS NETWORK WIRING GUIDELINES

Figure 35 illustrates a typical wiring diagram connection for a DeviceNet CANbus network. Note that the two trunk connections constitute the main cable of the network, with the five wires providing signal, power, and shielding. A printed circuit board assembly internally connects the two trunk connectors, or ports, and the I/O device taps. Most manufacturers of device bus networks provide “plug-and-play” connectors and wiring systems, which facilitate installation and system modifications (see Figure 36).

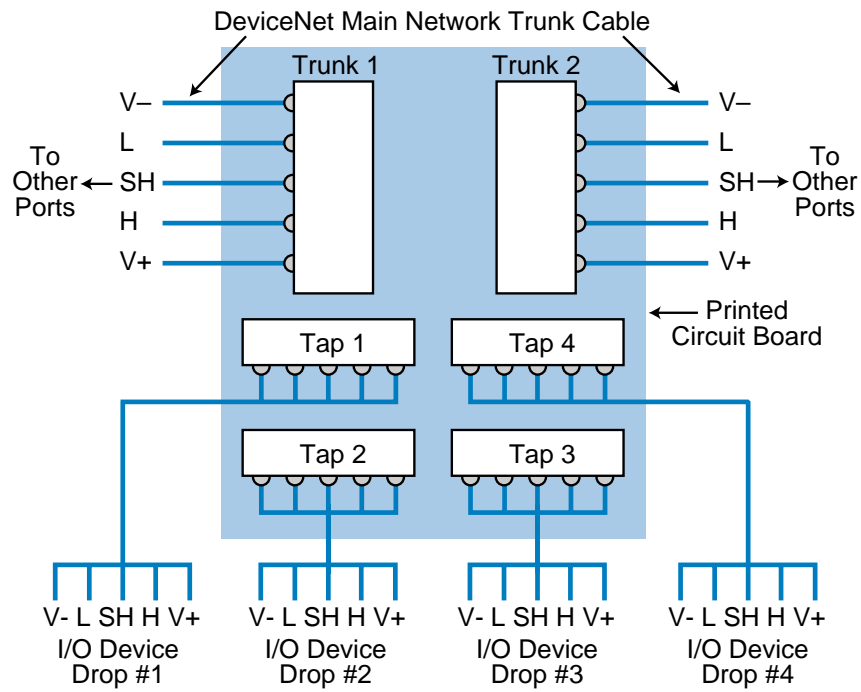

**Figure 35.** CANbus DeviceNet wiring diagram for the multiport tap in Figure 19-34.

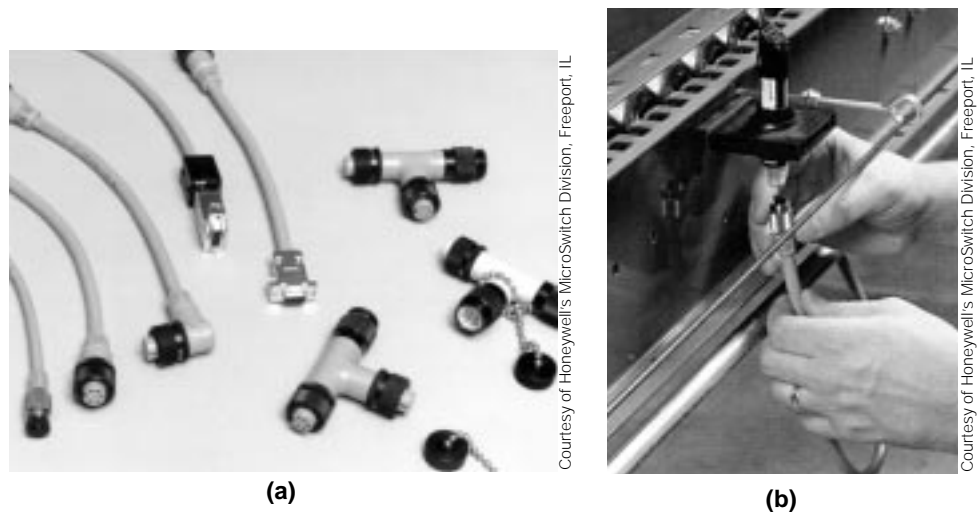

**Figure 36.** (a) Plug-and-play connectors and (b) their installation.



The majority of device bus networks require that a terminator resistor be present at the end of the main trunk line for proper operation and transmission of network data. Each network may also specify the number of nodes that can be connected to the network, the speed of transmission depending on the trunk length, and the maximum drop length at which field devices can be installed. The network may also limit the cumulative drop length, meaning that the combined lengths of all the drops cannot exceed a particular specification. Table 4 shows the specifications for Allen-Bradley's DeviceNet communication link network.

Data Transmission Rate	Trunk Length	Max. Drop Length	Max. # of Nodes	Cumulative Drop Length
125K bits/sec	500 m (1640 ft)	3 m (10 ft)	64	156 m (512 ft)
250K bits/sec	200 m (656 ft)			78 m (256 ft)
500K bits/sec	100 m (328 ft)			39 m (128 ft)

**Table 4.** DeviceNet specifications.


## PROCESS BUS NETWORK WIRING GUIDELINES

Cable criteria similar to device bus networks apply to process bus networks. Depending on the network protocol specifications, specifically those of layer 1 (physical) of the OSI model, the conductor may be twisted pair or coaxial, operating at different network transmission speeds. Table 5 shows the wiring and network speed characteristics of the Fieldbus Foundation network (Fieldbus protocol). Figure 37 shows the process bus interface for Allen-Bradley's family of PLCs, which is compatible with the Profibus protocol. This Profibus interface can work at network speeds of 9.6, 19.2, 93.75, 187.5,


	Data Rate		
	Slow	Standard	High
<b>Speed</b>	31.25K bps	1M bps	2. Mbps
<b>Cable</b>	twisted-pair	twisted-pair	twisted-pair
<b>Distance</b>	1900 m	750 m	500 m

**Table 5.** Fieldbus network characteristics.

and 500 kbits/sec. Process bus wiring installations may also require a termination block at the end of the wiring. T-junction connectors provide the connections to different I/O field devices (see Figure 38).

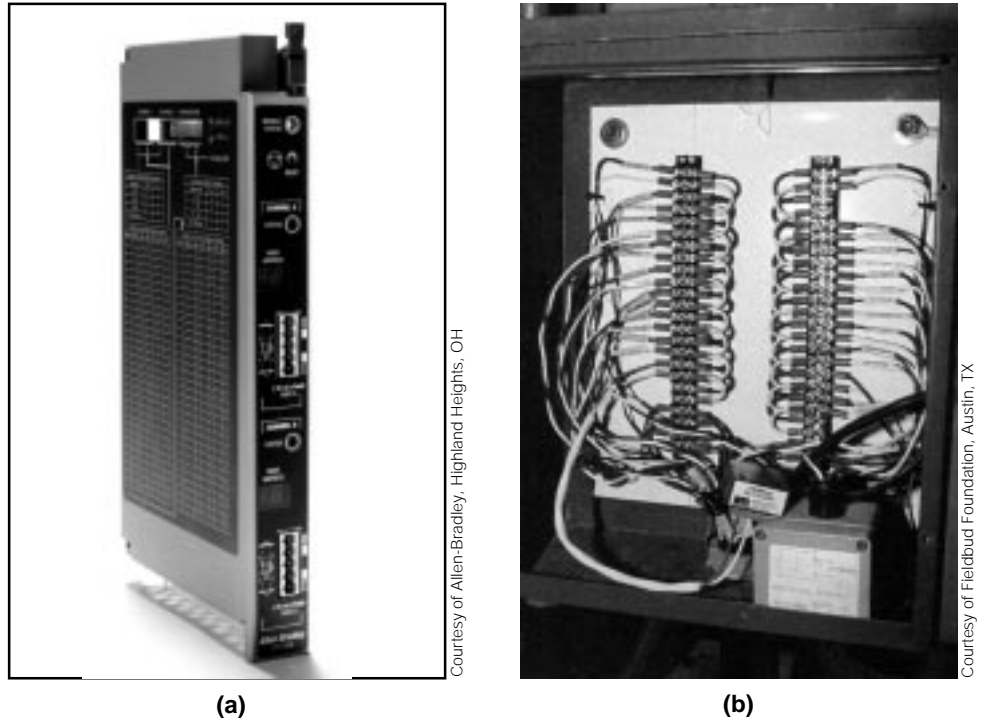


**Figure 37.** (a) Allen-Bradley's Profibus process bus interface and (b) the wiring installation of a Fieldbus network using two sets of shielded twisted-pair wire.

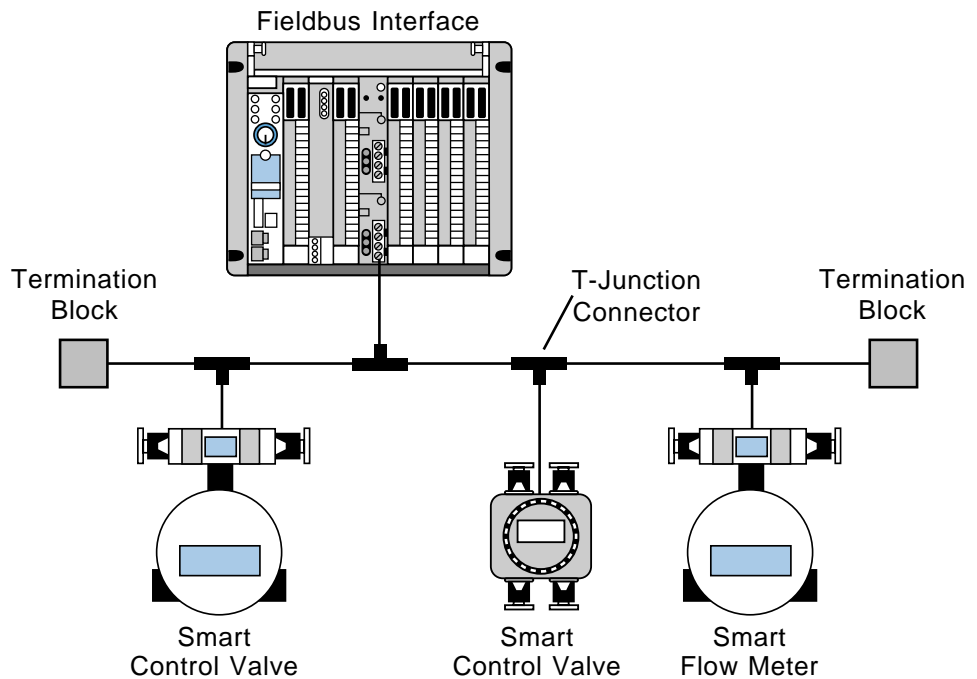


**Figure 38.** Fieldbus network using T-junction connectors.

## I/O BUS NETWORK ADDRESSING

Addressing of the I/O devices in an I/O bus network occurs during the configuration, or programming, of the devices in the system. Depending on the PLC, this addressing can be done either directly on the bus network via a PC and a gateway (see Figure 39a) or through a PC connected directly to the bus network interface (see Figure 39b). It can also be done through the PLC's RS-232 port (see Figure 40). Some I/O bus networks have switches that can be used to define device addresses, while others have a predefined address associated with each node drop.

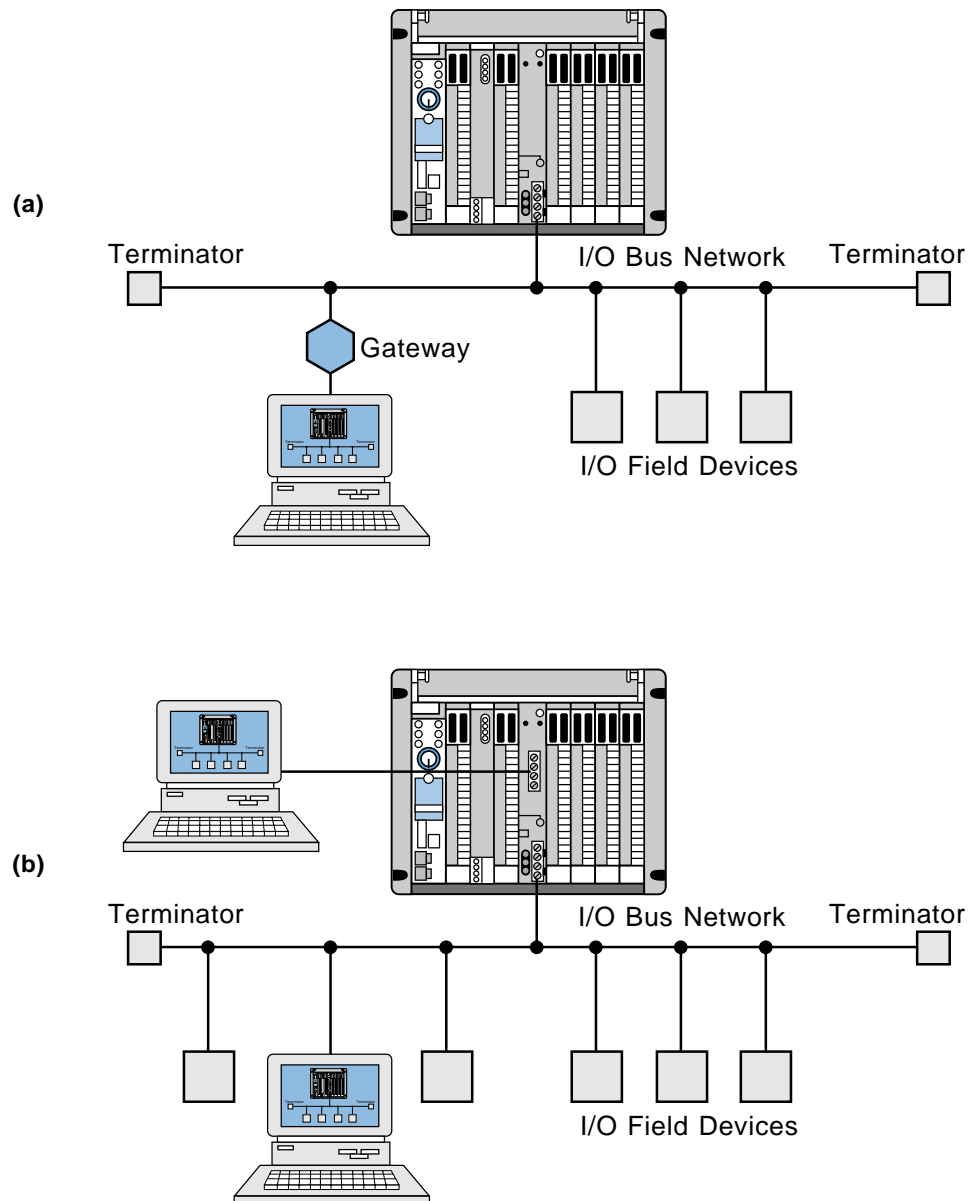

**Figure 39.** I/O addresses assigned using (a) a PC connected to the network through a gateway and (b) a PC connected directly to the network.

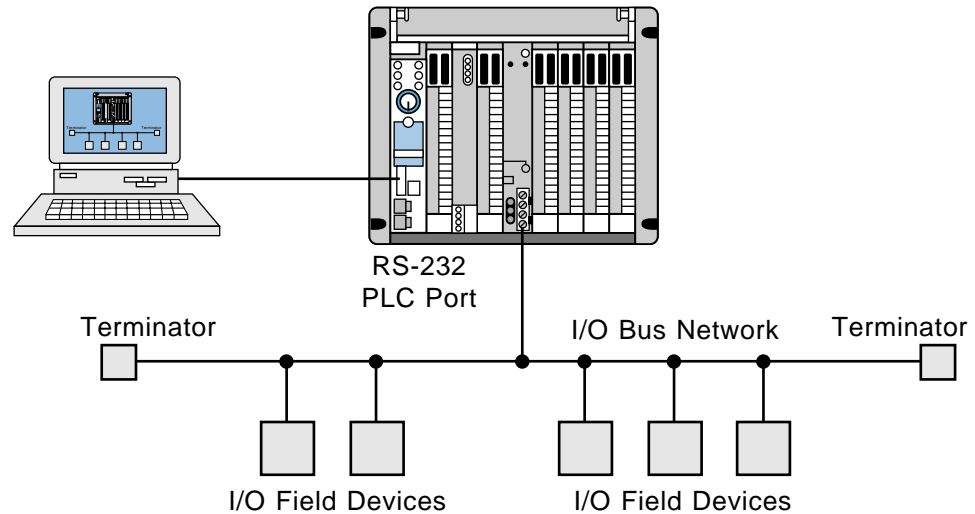

**Figure 40.** I/O addresses assigned using a PC connected to the PLC's RS-232 port.

## 7 SUMMARY OF I/O BUS NETWORKS

The device and process types of I/O bus networks provide incredible potential system cost savings, which are realized during installation of a control system. These two types of I/O networks can also form part of a larger, networked operation, as shown in Figure 41. In this operation, the information network communicates via Ethernet between the main computer system (or a personal computer) and a supervisory PLC. In turn, these PLCs communicate with other processors through a local area control network. The PLCs may also have remote I/O, device bus, and process bus subnetworks. The addition of field devices to this type of I/O network is relatively easy, as long as each field device is compatible with its respective I/O bus network protocol.

The main difference between the device bus and the process bus networks is the amount of data transmitted. This is due to the type of application in which each is used. Device bus networks are used in discrete applications, which transmit small amounts of information, while process bus networks are used in process/analog applications, which transmit large amounts of data. Figure 42 shows a graphic representation of these networks based on the potential amount of information that can be transmitted through them.

In terms of cost, a process bus network tends to be more expensive to implement than a device bus network, simply because analog I/O field devices are more expensive. Also, the intelligence built into a process bus network is more costly than the technology incorporated into a device bus network. For example, the CAN, SDS, ASI, ASIC, and InterBus-S chips used in device networks are readily available, standard, off-the-shelf chips, which


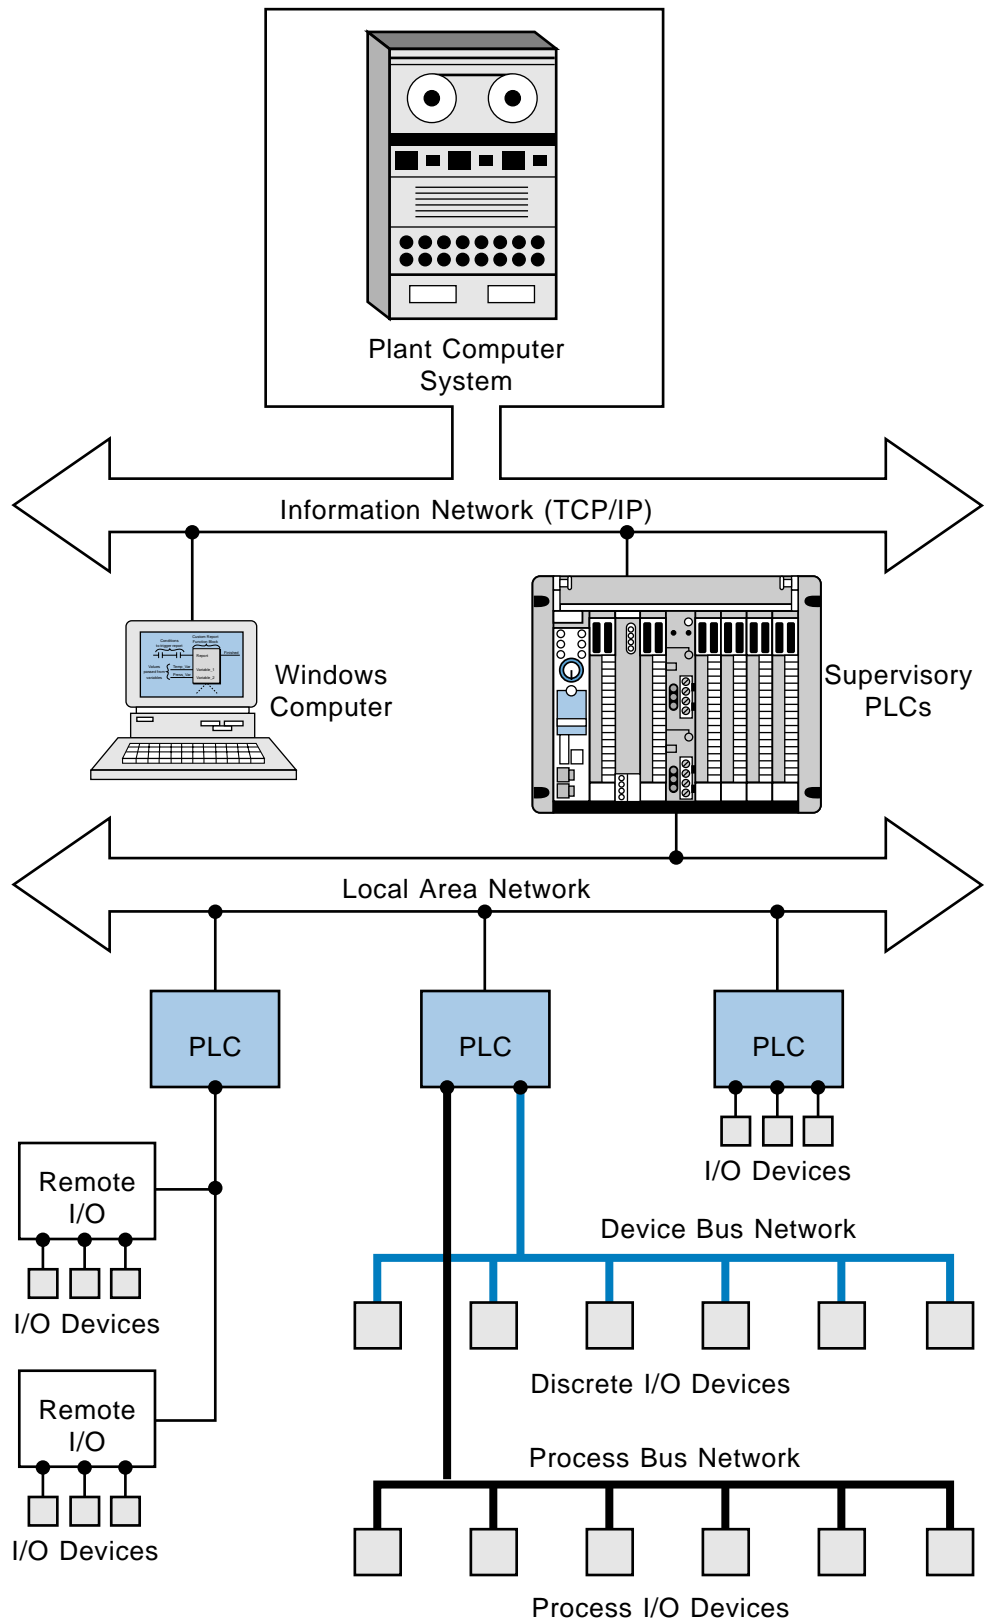


Figure 41. Large plantwide network.

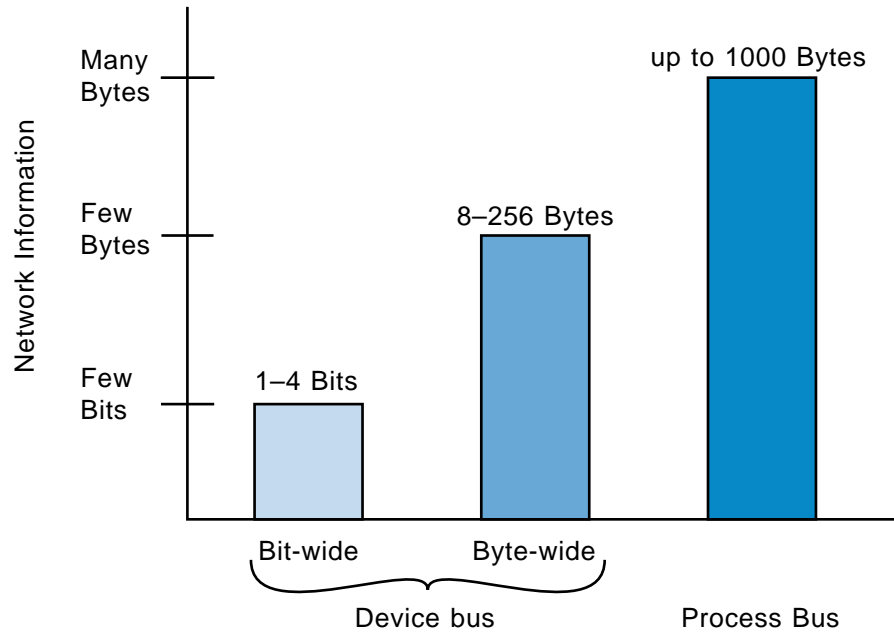

**Figure 42.** Network data transmission comparison.

can be purchased at a relatively low cost. Process bus networks, on the other hand, require devices with more sophisticated electronics, such as microprocessors, memory chips, and other supporting electronic circuitry, which makes process network I/O devices more expensive. This expense, however, is more than offset by the total savings for system wiring and installation, especially in the modernization of existing operations where wire runs may already be in place.

# **I/O Bus Networks— Including DeviceNet**

## **PLC Skills**

- **Review**
- **Reinforce**
- **Test**
- **Sharpen**

*Study Guide and Review  
Questions*

---

## STUDY GUIDE

---

- I/O bus networks allow PLCs to communicate directly with I/O devices through digital communication. The basic function of an I/O bus network is to communicate information with, as well as supply power to, the field devices that are connected to the bus.
- An I/O bus scanner reads and writes information to each of the field device addresses in an I/O bus network, as well as decodes the information contained in the network information packet.
- The two major types of I/O bus networks are device bus networks and process bus networks.
  - *Device bus networks* interface with low-level information devices that primarily transmit data relating to the state of the device and its operational status. These devices include discrete and simple analog devices.
  - *Process bus networks* interface with high-level information devices (i.e., analog devices) that transmit large amounts of data about not only their own operation, but the operation of the process as well.
- Neither device bus nor process bus networks have set protocol standards; however, several companies and organizations are working towards developing I/O bus network specifications.
- The digital communication scheme used by I/O bus networks offers a great advantage over other field device communication schemes because it eliminates the errors associated with analog-to-digital conversions, allows more than one device to be connected to a wire, provides a signal less susceptible to interference, and eliminates the need to scale process data. Another advantage of I/O bus networks is that they reduce the amount of wiring required to connect the field devices with the PLC.
- **Device bus networks** can only transmit small amounts of information, but they do so at a high transmission speed. Device bus networks can either be bit wide or byte wide.
  - *Byte-wide device bus networks* interface with discrete and small analog devices that transmit only a few bytes of data. These networks can transfer between 1 and 50 or more bytes of data at a time.
  - *Bit-wide device bus networks* interface with simple discrete devices only. They can transfer less than 8 bits of data over relatively short distances.
- The two most common types of byte-wide device bus networks are:
  - InterBus-S
  - CANbus (DeviceNet and SDS)
- The *InterBus-S byte-wide device bus network* connects discrete and small analog field devices to a PLC or computer via a ring network configuration. A PLC in this network communicates with the field devices in a master/slave method.



- An InterBus-S network can handle up to 4096 field I/O devices at a speed of 500 Kbaud with cyclic redundancy check error detection.
- I/O device addresses in an InterBus-S network are automatically determined by the devices' physical locations. Also, this network transmits data in frames, simultaneously updating information to all connected devices.
- *CANbus byte-wide device bus networks* use an open protocol system featuring nondestructive arbitration, variable length messages, and advanced error management. A four-wire cable—two wires for power, two for signal transmission, and a “fifth” shield wire—provides the connection to field devices. Two common types of CANbus networks are the DeviceNet and the SDS networks.
  - DeviceNet networks can support 64 field devices and a maximum of 2048 field devices. The PLC connects to the field devices in a trunkline configuration.
  - SDS networks also support 64 nodes; however, this increases to 126 addressable locations when the nodes are multiplexed.
- The CANbus network uses three OSI protocol layers and defines both the medium access control method and the physical signaling for the network. A CANbus scanner or an I/O processor provides the interface between a PLC and a CANbus network.
- The three most common types of bit-wide device bus networks are:
  - ASI
  - InterBus Loop
  - Seriplex
- The *ASI bit-wide device bus network* is appropriate for simple, discrete applications requiring no more than 124 I/O field devices. These field devices can be connected to up to 31 nodes in either a tree, star, or ring topology. ASI networks require a 24-VDC power supply connected through a two-wire, unshielded, untwisted cable.
- The *InterBus Loop bit-wide device bus network* is used to interface a PLC with simple sensor and actuator devices. This network uses the same protocol as the InterBus-S byte-wide network, thus these networks can communicate with each other through an InterBus Loop terminal module.
- The *Seriplex bit-wide device bus network* can connect up to 510 field devices to a PLC in either a master/slave or peer-to-peer communication scheme. This network can span distances of up to 5000 feet in a star, loop, tree, or multidrop configuration. A Seriplex network can connect with simple analog devices.
- **Process bus networks** are high-level, open, digital communication networks that are used to connect analog devices to a control system. These networks are capable of transmitting the enormous amounts of information associated with a process control application. The two most commonly used process bus protocols are:
  - Fieldbus
  - Profibus

- The *Fieldbus process bus network* is a digital, serial, multiport, two-way communication system that provides the desirable features associated with 4–20 mA analog systems, but also provides the advantages of reduced wiring, compatibility among Fieldbus devices, smaller space requirements, and reliability.
- The Fieldbus protocol is based on three layers of the OSI protocol—the physical layer (layer 1), the data link layer (layer 2), and the application layer (layer 7).
  - The physical layer of the Fieldbus protocol, corresponding to layer 1 of the OSI model, provides physical specifications for the network.
  - The communication stack portion of the Fieldbus network, corresponding to layers 2 and 7 of the OSI model, controls the transmission of messages through the network, as well as the coding and decoding of messages.
- The Fieldbus also provides another layer, the user layer, which implements the network's distributed control strategy and defines the software model for user interaction. This layer has three key elements: function blocks, device description services, and system management.
  - The function block capabilities allow connected field devices to be programmed through function blocks containing any instruction available in the system.
  - Device description services act as drivers, allowing the host computer in the network obtain message information.
  - The system management portion of the user layer schedules the execution of function blocks at precisely defined intervals.
- The *Profibus process bus network* is capable of communicating information between a master controller and an intelligent slave field device, as well as between hosts in the network. The three types of Profibus networks are Profibus-FMS, Profibus-DP, and Profibus-PA.
  - The Profibus-FMS network allows communication between the upper level, cell level, and device level of the Profibus hierarchy.
  - The Profibus-DP is a performance-optimized version of the Profibus-DP designed to handle time-critical communications.
  - The Profibus-PA is the process automation version of the Profibus network, providing bus-powered stations and intrinsic safety according to the transmission specifications of the IEC 1158-2 standard.
- The Profibus network follows the OSI model; however, each type of Profibus network contains slight variations of the model's layers.
- The most important aspects of I/O bus network installation are the use of the correct type of cable, number of conductors, and type of connectors. I/O bus networks can also have either open or enclosed ports.
- A typical device bus network wiring scheme includes two trunk connections with five wires each providing the signal, power, and shielding. Most device bus networks require a terminator resistor at the end of the main trunkline. Similar cabling criteria apply to process bus networks.

- The addressing of devices in an I/O bus network occurs during the programming of devices in the system. This can be done either on the network using a PC connected directly to the network or connected to it through a gateway, or it can be done through the PLC's RS-232 port.

## REVIEW QUESTIONS

---

- 1 An I/O bus network can be defined as a \_\_\_\_\_.
  - a-network that communicates I/O operating status
  - b-local area network that connects with an Internet router
  - c-network that allows direct communication between a PLC and intelligent I/O field devices
  - d-communication scheme used to establish peer-to-peer data exchange
- 2 I/O bus networks require the use of an \_\_\_\_\_ to communicate with the host controller.
  - a-I/O connector
  - b-I/O RS-232 compatible cable
  - c-I/O network sequencer
  - d-I/O bus scanner
- 3 Match the following terms with their appropriate descriptions:
 

_____ I/O field devices	a-interfaces with low-level devices
_____ device bus network	b-interfaces with high-level devices
_____ process bus network	c-uses built-in intelligence to communicate with the network
- 4 Device bus networks transmit \_\_\_\_\_ information, while process bus networks transfer \_\_\_\_\_ information.
  - a-reversible
  - b-large amounts of
  - c-small amounts of
  - d-medium amounts of
  - e-direct
- 5 The two types of device bus networks are \_\_\_\_\_ and \_\_\_\_\_.
  - a-table wide
  - b-bit wide
  - c-byte wide
  - d-register wide
  - e-baud wide
- 6 *True/False.* The digital transmission of data in an I/O bus network is one of its greatest advantages.
- 7 *True/False.* The process bus is an attempt to eliminate the need to transmit 4–20mA analog signals to host controllers.

- 8 Match the following types of networks with their appropriate descriptions:
- |                           |                       |
|---------------------------|-----------------------|
| _____ Profibus            | a–CANbus              |
| _____ DeviceNet           | b–byte wide           |
| _____ Fieldbus Foundation | c–bit wide            |
| _____ Seriplex            | d–process bus network |
| _____ InterBus-S          | e–Fieldbus protocol   |
- 9 The InterBus-S from \_\_\_\_\_ can support \_\_\_\_\_ through the use of smart I/O modules.
- a–Square D
  - b–Phoenix Contact
  - c–RS-232 devices
  - d–nonintelligent field devices
  - e–intelligent devices
- 10 There are \_\_\_\_\_ wires in a CANbus network, including \_\_\_\_\_ power wires, \_\_\_\_\_ signal wires, and \_\_\_\_\_ shield wire.
- 11 \_\_\_\_\_ and \_\_\_\_\_ are both CANbus networks.
- a–SDS
  - b–InterBus-S
  - c–Profibus
  - d–Fieldbus
  - e–DeviceNet
- 12 *True/False.* The InterBus-S uses only two layers of the ISO model.
- 13 The number of field devices connected to an SDS device network can be expanded using \_\_\_\_\_.
- a–additional connector expanders
  - b–smart single-point I/O field devices
  - c–a high-density I/O concentrator
  - d–standard PLC remote subsystems
- 14 CANbus stands for \_\_\_\_\_ and its technology was originally developed by \_\_\_\_\_.
- a–several companies
  - b–the automotive industry
  - c–control area network bus
  - d–control actuator network bus
  - e–the computer industry
- 15 *True/False.* ASI is a bit-wide process bus network.
- 16 *True/False.* The InterBus Loop bit-wide device network cannot communicate with the byte-wide InterBus-S.

- 
- 17 Seriplex utilizes the \_\_\_\_\_ chip, which is also used by the intelligent field devices in the bus's interfaces.
- a-ASI
  - b-asynchronous communicator
  - c-ASIC
  - d-proprietary
- 18 *True/False.* A Seriplex network can be configured without a host controller.
- 19 *True/False.* The Fieldbus and Profibus are the two most common process bus network protocols.
- 20 *True/False.* Process bus networks transfer data at a very slow rate because of the nature of the analog signals they transmit.
- 21 Layers 2 and 7 of the Fieldbus protocol compose the protocol's \_\_\_\_\_.
- a-Fieldbus transport layers
  - b-Fieldbus application transport
  - c-communication stack
  - d-data link stack
- 22 The Fieldbus protocol is characterized by a(n) \_\_\_\_\_, which contains capabilities for function block programming, device description services, and network system management.
- a-extended application layer
  - b-user layer
  - c-network layer
  - d-function layer
- 23 *True/False.* The Fieldbus process bus network from the Fieldbus Foundation can support intrinsically safe devices and installations.
- 24 The Fieldbus network can operate at two speeds, \_\_\_\_\_ and \_\_\_\_\_.
- a-H1 (low speed of 15 Kbaud)
  - b-H1 (low speed of 31.25 Kbaud)
  - c-H1 (low speed of 30 Kbaud)
  - d-H2 (high speed of 1 Mbaud or 2.5 Mbaud)
  - e-H2 (high speed of 7 Mbaud)
- 25 *True/False.* In a Fieldbus network, it is not possible to connect networks at both speeds to only one host.
- 26 The Fieldbus protocol uses two types of message transmissions, \_\_\_\_\_ and \_\_\_\_\_, which relate to \_\_\_\_\_ and \_\_\_\_\_ transmissions, respectively.
- a-cyclic
  - b-acyclic
  - c-unscheduled
  - d-rescheduled
  - e-scheduled

- 27 \_\_\_\_\_ are encapsulated control functions that allow the performance of I/O operations, such as PID control and the reading of analog I/O.
- a–User instructions
  - b–Data instructions
  - c–Ladder instructions
  - d–Function blocks
- 28 *True/False.* All devices connected to a Fieldbus network must have a device description.
- 29 *True/False.* The system manager in a Fieldbus network schedules the execution of function blocks at precisely defined intervals and automatically assigns field device addresses.
- 30 Match the following types of Profibus networks with their descriptions:
- |   |                |
|---|----------------|
| _____ process automation version  | a–Profibus-FMS |
| _____ performance-optimized version   | b–Profibus-DP  |
| _____ communicates between upper-level, cell-level, and field-level devices | c–Profibus-PA  |
- 31 *True/False.* The Fieldbus message specification (FMS) and the lower layer interface (LLI) used in the Profibus-FMS are implemented in layer 7 of the ISO model.
- 32 *True/False.* The Profibus-DP network does not implement layer 7 of the ISO model so that it can achieve the high operational speed required for its application.
- 33 The Profibus-DP uses a \_\_\_\_\_ to provide the mapping between the user interface and layer 2 of the network.
- a–direct access mapper (DAM)
  - b–data mapping manager (DMM)
  - c–direct data link mapper (DDLMM)
  - d–direct Profibus mapper (DPM)
- 34 *True/False.* The Profibus-PA protocol implements function blocks in layer 7 of the ISO model.
- 35 A Profibus network can support \_\_\_\_\_ communication.
- a–master-master
  - b–master-slave
  - c–a combination of master-master and master-slave
  - d–none of the above
- 36 The Profibus network adheres to the \_\_\_\_\_ standard.
- a–EIA RS-429
  - b–EIA RS-232
  - c–EIA RS-422
  - d–EIA RS-485

- 37 *True/False.* All device bus network cables are the same.
- 38 *True/False.* When computing network distances, the user must take into consideration the maximum drop length in addition to the trunk length.
- 39 In general, \_\_\_\_\_ field devices are more expensive than \_\_\_\_\_ field devices because their components are more expensive.
- a-I/O bus-compatible
  - b-process bus-compatible
  - c-program bus-compatible
  - d-device bus-compatible
  - e-LAN-compatible

---

## ANSWERS

---

- 1 c—network that allows direct communication between a PLC and intelligent I/O field devices
- 2 d—I/O bus scanner
- 3 c I/O field devices  
a device bus network  
b process bus network
- 4 c—small amounts of, b—large amounts of
- 5 b—bit wide, c—byte wide
- 6 true
- 7 true
- 8 d Profibus  
a DeviceNet  
e Fieldbus Foundation  
c Seriplex  
b InterBus-S
- 9 b—Phoenix Contact, d—nonintelligent field devices
- 10 five, two, two, one
- 11 a—SDS, e—DeviceNet
- 12 false; it uses three of the ISO layers—the physical, data link, and application layers
- 13 c—a high-density I/O concentrator
- 14 c—control area network bus, b—the automotive industry
- 15 true
- 16 false; the InterBus-S and the InterBus Loop share the same protocol, making it possible for them to communicate with each other
- 17 c—ASIC
- 18 true
- 19 true
- 20 false; process bus networks can transfer data at a fast rate, but the amount of data they transmit is large
- 21 c—communication stack
- 22 b—user layer
- 23 true
- 24 b—H1 (low speed of 31.25 Kbaud), d—H2 (high speed of 1 Mbaud or 2.5 Mbaud)
- 25 false; it is possible to connect networks at both speeds to only one host



- 26 a-cyclic, b-acyclic, e-scheduled, c-unscheduled
- 27 d-Function blocks
- 28 true
- 29 true
- 30 c process automation version  
b performance-optimized version  
a communicates between upper-level, cell-level, and field-level devices
- 31 true
- 32 true
- 33 c-direct data link mapper (DDLMM)
- 34 true
- 35 c-a combination of master-master and master-slave
- 36 d-EIA RS-485
- 37 false; the number of conductors and type of cable (shielded or unshielded) varies according to each individual device bus network
- 38 true
- 39 b-process bus-compatible, d-device bus-compatible